

R&S®ETH

Handheld TV Analyzer

Specifications



CONTENTS

Definitions	3
Specifications	4
TV analyzer	4
Frequency	4
Level	4
RF preselection (R&S®ETH-K1 option)	5
DVB-T/DVB-H analysis (R&S®ETH-K140 option)	5
ISDB-T analysis (R&S®ETH-K160 option)	7
Spectrum analysis	9
Frequency	9
Sweep time	9
Bandwidths	9
Level	10
Trigger functions	11
Scalar network analysis	11
Vector network analysis	12
Distance-to-fault measurement	12
Inputs and outputs	13
General data	14
Accessories	15
R&S®FSH-Z1 and R&S®FSH-Z18 power sensors	15
R&S®FSH-Z14 directional power sensor	15
R&S®FSH-Z44 directional power sensor	17
R&S®FSH-Z3 VSWR bridge	18
R&S®FSH-Z2 VSWR bridge	19
R&S®HA-Z240 GPS receiver	20
Ordering information	21
Options	21
Accessories	22

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, $\leq$, $>$, $\geq$, $\pm$, or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

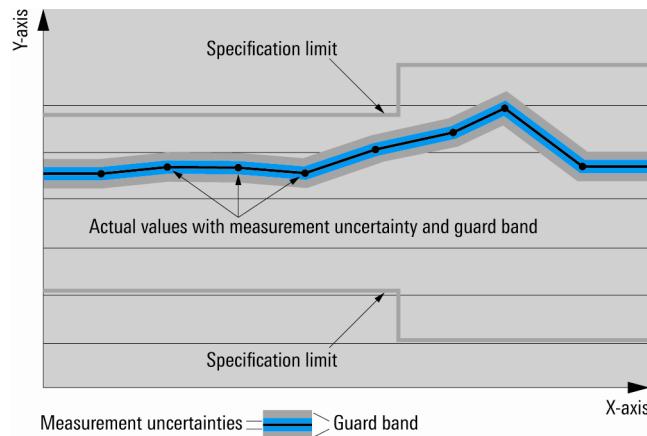

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Specifications

TV analyzer

Frequency

Frequency range	model .14	4.5 MHz to 3.6 GHz
	model .18	4.5 MHz to 8 GHz
Resolution		1 Hz
Reference frequency, internal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +30 °C	1×10^{-6}
	+30 °C to +50 °C	3×10^{-6}
Achievable initial calibration accuracy		5×10^{-7}
Total reference uncertainty	0 °C to +30 °C	(time since last adjustment $\times$ aging rate) + temperature drift + calibration accuracy
Reference frequency, with R&S®HA-Z240 GPS receiver option		
Frequency uncertainty	GPS on, ≥ 1 minute after satellite lock	2.5×10^{-8}
	up to 30 minutes after losing satellite lock	5×10^{-8}
Spectral purity of SSB phase noise		
Carrier offset	RF = 500 MHz	
	30 kHz	< -98 dBc (1 Hz), -102 dBc (1 Hz) (typ.)
	100 kHz	< -100 dBc (1 Hz), -106 dBc (1 Hz) (typ.)
	1 MHz	< -125 dBc (1 Hz), -131 dBc (1 Hz) (typ.)

Level

Noise figure	RF = 500 MHz, RF attenuation = 0 dB	
	RF preselection = off	< 22 dB, 18 dB (typ.)
	RF preselection = on ¹	< 14 dB, 11 dB (typ.)
Third-order intermodulation (TOI) (nominal values)	RF attenuation = 5 dB, RF preselection = off	
	50 MHz to 2 GHz	12 dBm
	2 GHz to 8 GHz	15 dBm
	RF attenuation = 5 dB, RF preselection = on ¹	
	50 MHz to 200 MHz	-3 dBm
	200 MHz to 3.6 GHz	0 dBm
	3.6 GHz to 8 GHz	+3 dBm
Second-order intermodulation (SOI) (nominal values)	RF = 500 MHz, RF attenuation = 5 dB	
	RF preselection = off	45 dBm
	RF preselection = on ¹	55 dBm
Immunity to interference (nominal values)		
Image frequencies, referenced to signal level	$f_{in} - 2 \times 20.8$ MHz	-70 dB
	$f_{in} - 2 \times 829.8$ MHz	-80 dB
	$f_{in} - 2 \times 4874.8$ MHz	-90 dB
Intermediate frequencies, referenced to signal level	20.8 MHz	-60 dB
	829.8 MHz, 4874.8 MHz, 8919.8 MHz	-80 dB
Other interfering signals, referenced to signal level	signal level – RF attenuation < -30 dBm, RF preselection = off	
	10.4 MHz	-60 dB
	2437.4 MHz	-60 dB
	signal level – RF attenuation < -30 dBm, RF preselection = off, RF ≤ 3.6 GHz	
	spurious at $f_{in} - 2437.4$ MHz	-80 dB
	signal level – RF attenuation < -40 dBm, RF preselection = off, RF ≥ 3.6 GHz	
	4459.9 MHz	-40 dB
Spurious response, inherent	input matched to 50 Ω , without input signal, RF attenuation = 0 dB	
	RF preselection = off	< -90 dBm
	RF preselection = on ¹	< -100 dBm
Maximum rated input level (nominal values)		
DC voltage		80 V
RF power		27 dBm (= 0.5 W)
CW RF power		30 dBm (= 1 W)
Peak RF power	duration < 3 s	33 dBm (= 2 W)
Max. pulse voltage		100 V
Max. pulse energy	pulse width 10 μ s	10 mWs

¹ R&S®ETH-K1 option required.

RF preselection (R&S®ETH-K1 option)

Lower 3 dB cutoff frequency	RF up to 80 MHz	500 kHz
	80 MHz to 200 MHz	RF – 15 MHz
	0.2 GHz to 1.5 GHz	$0.9 \times \text{RF}$
	1.5 GHz to 3.6 GHz	1.3 GHz
	3.6 GHz to 8 GHz	3.2 GHz
Upper 3 dB cutoff frequency	RF up to 80 MHz	80 MHz
	80 MHz to 200 MHz	RF + 15 MHz
	0.2 GHz to 1.5 GHz	$1.1 \times \text{RF}$
	1.5 GHz to 3.6 GHz	3.7 GHz
	3.6 GHz to 8 GHz	8 GHz

DVB-T/DVB-H analysis (R&S®ETH-K140 option)

Level

Minimum RF power for quasi error-free transport stream data	RF = 500 MHz, RF attenuation = 0 dB, BER before RS < 2.0×10^{-4} , 64QAM nonhierarchical modulation, guard interval = 1/32, code rate = 3/4	
	RF preselection = off	< –64 dBm, –69 dBm (typ.)
	RF preselection = on ¹	< –72 dBm, –76 dBm (typ.)
Maximum RF power for quasi error-free transport stream data (nominal values)	RF = 500 MHz, BER before RS < 2.0×10^{-4}	
	RF attenuation = 40 dB, RF preselection = off	10 dBm
	RF attenuation = 50 dB, RF preselection = on ¹	10 dBm

Bandwidths

OFDM signal bandwidth range	1 MHz to 8 MHz
Resolution	0.1 Hz
Predefined channel filter bandwidths	5/6/7/8 MHz
Channel filter shape factor 80 dB:0.1 dB	≤ 1.09 (nom.)

Demodulation

Standard	terrestrial TV in line with ETSI EN 300744	DVB-T, DVB-H
FFT mode	automatic detection	2K, 4K, 8K
QAM order	automatic detection	4QAM, 16QAM, 64QAM
QAM hierarchy	automatic detection	none, $\alpha = 1, 2, 4$
Guard interval	automatic detection	1/4, 1/8, 1/16, 1/32
Code rate	automatic detection	1/2, 2/3, 3/4, 5/6, 7/8
Interleaver mode	automatic detection	native, in-depth
Inherent modulation error ratio (MER)	RF attenuation = 0 dB, 64QAM nonhierarchical modulation, 8K FFT, guard interval = 1/32, slow channel adaptation	
	level = –30 dBm, RF preselection = off	
	RF = 50 MHz to 862 MHz	> 40 dB
	RF = 500 MHz	45 dB (typ.)
	level = –45 dBm, RF preselection = on ¹	
	RF = 50 MHz to 862 MHz	> 38 dB
	RF = 500 MHz	44 dB (typ.)

Measurements

Measurement parameter list	signal level, crest factor, carrier frequency offset, symbol rate offset, modulation error ratio (MER RMS), modulation error ratio (MER peak), error vector magnitude (EVM RMS), error vector magnitude (EVM peak), bit error ratio before Viterbi decoder, bit error ratio before Reed-Solomon decoder, packet error ratio, packet errors per second, MPEG transport stream rate	
Transmission parameter signaling (TPS)	FFT, guard interval, QAM, hierarchy, code rate, cell ID, TPS reserved (frames 1 to 4), interleaver mode, MPE FEC, time slicing, length indicator	
Constellation diagram	QAM order	4QAM, 16QAM, 64QAM
	QAM hierarchy	none, $\alpha = 1, 2, 4$
Echo pattern (channel impulse response)	level range	50 dB
	time range, extended span off	$T_{\text{symbol}}/3$
	time range, extended span on	T_{symbol}
	span units	μs , km, miles
	marker level resolution	0.1 dB
	marker type	relative level, absolute level
	marker functions	set to peak, set to next peak, center = marker
	echo pattern peak list	13 highest peaks with relative and absolute level and time or distance
MER(k) (modulation error ratio versus OFDM carriers)	MER range	10/20/50 dB
	carrier range	all modulated OFDM carriers
	marker position units	carrier number, relative frequency, absolute frequency
	marker MER resolution	0.1 dB
	marker functions	set to peak, set to next peak
	trace detectors	RMS, auto peak, min. peak, max. peak
TV spectrum	lower and upper shoulder attenuation in line with ETSI TR 101290	
	in-channel amplitude frequency response, peak-to-peak	
	carrier to noise	
	occupied bandwidth	
Spectrum emission mask	spectrum emission test against emission mask	

Measurement uncertainty		
Signal level	95 % confidence level, +20 °C to +30 °C, C/N > 16 dB, RF attenuation = auto	
	10 MHz to 3.6 GHz	< 1 dB, 0.5 dB (typ.)
	3.6 GHz to 8 GHz	< 1.5 dB, 1 dB (typ.)
Crest factor		< 0.5 dB (typ.)
Carrier frequency offset		RF × reference uncertainty
Symbol rate offset		reference uncertainty
MPEG TS bit rate		MPEG TS bit rate × reference uncertainty
Modulation error ratio (MER)	RF = 500 MHz, 64QAM, slow channel adaptation	
	20 dB to 30 dB	< 1.0 dB (typ.)
	30 dB to 35 dB	< 1.5 dB (typ.)
	35 dB to 40 dB	< 2.0 dB (typ.)
Error vector magnitude (EVM)	RF = 500 MHz, 64QAM, slow channel adaptation, referenced to measured value	
	0.65 % to 1.2 %	< 25 %
	1.2 % to 2 %	< 20 %
	2 % to 7 %	< 12 %
BER before Viterbi decoder	1.0×10^{-3} to 0.1×10^{-15} , 0.0	$0.1 \times 10^{-\text{exponent}}$
BER before Reed-Solomon decoder	1.0×10^{-3} to 0.1×10^{-15} , 0.0	$0.1 \times 10^{-\text{exponent}}$
Packet error ratio	1.0×10^{-1} to 0.1×10^{-12} , 0.0	$0.1 \times 10^{-\text{exponent}}$
Echo pattern peak level	within guard interval	< 0.5 dB (typ.)

ISDB-T analysis (R&S®ETH-K160 option)

Level

Minimum RF power for quasi error-free transport stream data (nominal values)	RF = 500 MHz, RF attenuation = 0 dB, BER before RS < 2.0×10^{-4} , QPSK modulation, guard interval = 1/8, code rate = 2/3	
	RF preselection = off	–80 dBm (typ.)
	RF preselection = on ²	–88 dBm (typ.)
Maximum RF power for quasi error-free transport stream data (nominal values)	RF = 500 MHz, RF attenuation = 0 dB, BER before RS < 2.0×10^{-4}	
	RF attenuation = 40 dB, RF preselection = off	10 dBm
	RF attenuation = 50 dB, RF preselection = on ²	10 dBm

Bandwidth

Channel filter bandwidth	6 MHz
Channel filter shape factor 75 dB:0.12 dB	≤ 1.10 (nom.)

Demodulation

Standard	terrestrial TV in line with ARIB STD-B31	ISDB-T
ISDB-T mode	automatic detection	mode 1 (2K), mode 2 (4K), mode 3 (8K)
Modulation	automatic detection	DQPSK, QPSK, 16QAM, 64QAM
Layer	automatic detection	A, B, C
Partial reception	automatic detection	
Segments per layer	automatic detection	13 in total (layer A + layer B + layer C)
Guard interval	automatic detection	1/4, 1/8, 1/16, 1/32
Code rate (all layers)	automatic detection	1/2, 2/3, 3/4, 5/6, 7/8
Interleaver mode	mode 1 (2K FFT)	0, 4, 8, 16
	mode 2 (4K FFT)	0, 2, 4, 8
	mode 3 (8K FFT)	0, 1, 2, 4
Inherent modulation error ratio (MER total, RMS)	RF attenuation = 0 dB, 64 QAM modulation, 8K FFT, guard interval = 1/32, slow channel adaptation	
	level = –30 dBm, RF preselection = off	
	RF = 50 MHz to 862 MHz	> 40 dB
	RF = 500 MHz	45 dB (typ.)
	level = –45 dBm, RF preselection = on ²	
	RF = 50 MHz to 862 MHz	> 38 dB
	RF = 500 MHz	44 dB (typ.)

² R&S®ETH-K1 option required.

Measurements

Measurement parameter list	signal level, crest factor, RF offset, symbol rate offset, total modulation error ratio (MER total, RMS), total modulation error ratio (MER total, peak), modulation error ratio of each layer (MER layer, RMS), modulation error ratio of TMCC (MER TMCC, RMS), modulation error ratio of AC (MER AC, RMS), sideband position, bit error ratio before Viterbi decoder, bit error ratio before Reed-Solomon decoder, bit error ratio after Reed-Solomon decoder, packet errors per second, MPEG transport stream rate	
Transmission and multiplexing configuration control (TMCC)	ISDB-T mode, parameter switching indicator, emergency alarm broadcasting, partial reception, phase shift correction, reserved bits, modulation, code rate, time interleaving, number of segments	
Constellation diagram	QAM order	DQPSK, QPSK, 16QAM, 64QAM
Echo pattern (channel impulse response)	level range	50 dB
	time range, extended span off	$T_{\text{symbol}}/3$
	time range, extended span on	T_{symbol}
	span units	μs, km, miles
	marker level resolution	0.1 dB
	marker type	relative level, absolute level
	marker functions	set to peak, set to next peak, center = marker
	echo pattern peak list	12 highest peaks with relative and absolute level and time or distance
MER(k) (modulation error ratio versus OFDM carriers)	MER range	10/20/50 dB
	carrier range	all modulated OFDM carriers
	marker position units	carrier number, relative frequency, absolute frequency
	marker MER resolution	0.1 dB
	marker functions	set to peak, set to next peak
	trace detectors	RMS, auto peak, min. peak, max. peak
TV spectrum	lower and upper shoulder attenuation in line with ETSI TR 101290	
	in-channel amplitude frequency response, peak-to-peak	
	carrier to noise	
	occupied bandwidth	
Spectrum emission mask	spectrum emission test against emission mask	

Measurement uncertainty		
Signal level	95 % confidence level, +20 °C to +30 °C, C/N > 16 dB, RF attenuation = auto	
	10 MHz to 3.6 GHz	< 1 dB, 0.5 dB (typ.)
	3.6 GHz to 8 GHz	< 1.5 dB, 1 dB (typ.)
Crest factor		< 0.5 dB (typ.)
RF offset		RF × reference uncertainty
Symbol rate offset		reference uncertainty
MPEG TS bit rate		MPEG TS bit rate × reference uncertainty
Modulation error ratio	RF = 500 MHz, slow channel adaptation	
	20 dB to 30 dB	< 1.0 dB (typ.)
	30 dB to 35 dB	< 1.5 dB (typ.)
	35 dB to 40 dB	< 2.0 dB (typ.)
BER before Viterbi decoder	1.0×10^{-3} to 0.1×10^{-15} , 0.0	$0.1 \times 10^{-\text{exponent}}$
BER before Reed-Solomon decoder	1.0×10^{-3} to 0.1×10^{-15} , 0.0	$0.1 \times 10^{-\text{exponent}}$
BER after Reed-Solomon decoder	1.0×10^{-3} to 0.1×10^{-15} , 0.0	$0.1 \times 10^{-\text{exponent}}$
Echo pattern peak level	within guard interval	< 0.5 dB (typ.)

Spectrum analysis

Frequency

Frequency range	model .14	100 kHz to 3.6 GHz
	model .18	100 kHz to 8 GHz
Resolution		1 Hz
Reference frequency, internal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +30 °C	1×10^{-6}
	+30 °C to +50 °C	3×10^{-6}
Achievable initial calibration accuracy		5×10^{-7}
Total reference uncertainty	0 °C to +30 °C	(time since last adjustment $\times$ aging rate) + temperature drift + calibration accuracy
Reference frequency, with R&S®HA-Z240 GPS receiver option		
Frequency uncertainty	GPS on, ≥ 1 minute after satellite lock	2.5×10^{-8}
	up to 30 minutes after losing satellite lock	5×10^{-8}
Frequency readout		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Frequency counter uncertainty	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2}(\text{last digit}))$
	with R&S®HAZ240 GPS receiver option	
	GPS on, ≥ 1 minute after satellite lock	2.5×10^{-8}
	up to 30 minutes after losing satellite lock	5×10^{-8}
Frequency span		0 Hz, 10 Hz to 3.6 GHz/8 GHz
Frequency span uncertainty		1 % (nom.)
Spectral purity of SSB phase noise		
Carrier offset	RF = 500 MHz	
	30 kHz	< -98 dBc (1 Hz), -102 dBc (1 Hz) (typ.)
	100 kHz	< -100 dBc (1 Hz), -106 dBc (1 Hz) (typ.)
	1 MHz	< -125 dBc (1 Hz), -131 dBc (1 Hz) (typ.)

Sweep time

Sweep time	span = 0 Hz	200 μ s to 100 s
	10 Hz $\leq$ span $\leq$ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms $\times$ span/600 MHz to 1000 s
Uncertainty	span = 0 Hz	1 % (nom.)
	span $\geq$ 10 Hz	3 % (nom.)

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	100 Hz to 3 MHz in 1, 3 sequence
Bandwidth accuracy	100 Hz $\leq$ RBW $\leq$ 300 kHz	< 5 % (nom.)
	RBW > 300 kHz	< 10 % (nom.)
Selectivity 60 dB:3 dB		< 5 (nom.) (Gaussian type filters)
Video filters		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1, 3 sequence
RF preselection (R&S®ETH-K1 option)		
Lower 3 dB cutoff frequency	RF up to 80 MHz	500 kHz
	80 MHz to 200 MHz	RF - 15 MHz
	0.2 GHz to 1.5 GHz	$0.9 \times \text{RF}$
	1.5 GHz to 3.6 GHz	1.3 GHz
	3.6 GHz to 8 GHz	3.2 GHz
Upper 3 dB cutoff frequency	RF up to 80 MHz	80 MHz
	80 MHz to 200 MHz	RF + 15 MHz
	0.2 GHz to 1.5 GHz	$1.1 \times \text{RF}$
	1.5 GHz to 3.6 GHz	3.7 GHz
	3.6 GHz to 8 GHz	8 GHz

Level

Display range		displayed noise floor to +20 dBm
Maximum rated input level (nominal values)		
DC voltage		80 V
RF power		27 dBm (= 0.5 W)
CW RF power		30 dBm (= 1 W)
Peak RF power	duration < 3 s	33 dBm (= 2 W)
Max. pulse voltage		100 V
Max. pulse energy	pulse width 10 μ s	10 mWs
Intermodulation		
Third-order intermodulation (TOI) (nominal values)	intermodulation-free dynamic range, signal level 2×-15 dBm, RF attenuation = 5 dB, RF preselection = off	
	50 MHz to 2 GHz	54 dBc (TOI + 12 dBm)
	2 GHz to 8 GHz	60 dBc (TOI + 15 dBm)
	intermodulation-free dynamic range, signal level 2×-30 dBm, RF attenuation = 5 dB, RF preselection = on ³	
	50 MHz to 200 MHz	54 dBc (TOI – 3 dBm)
	200 MHz to 3.6 GHz	60 dBc (TOI 0 dBm)
	3.6 GHz to 8 GHz	66 dBc (TOI + 3 dBm)
Second-order intermodulation (SOI) (nominal values)	signal level 2×-30 dBm (250.0 MHz & 250.1 MHz), RF attenuation = 5 dB, RF preselection = off	
	500 MHz	45 dBm
	signal level 2×-30 dBm (250.0 MHz & 250.1 MHz), RF attenuation = 5 dB, RF preselection = on ³	
	500 MHz	55 dBm
Displayed average noise level	RF attenuation = 0 dB, 50 Ω termination, RBW = 1 kHz, VBW = 10 Hz, sample detector, trace average = 10, log scaling, tracking generator = off, normalized to 1 Hz	
	RF preselection = off	
	100 kHz to 1 MHz	< –125 dBm, –130 dBm (typ.)
	1 MHz to 2 GHz	< –150 dBm, –156 dBm (typ.)
	2 GHz to 3 GHz	< –147 dBm, –153 dBm (typ.)
	3 GHz to 6 GHz	< –145 dBm, –152 dBm (typ.)
	6 GHz to 7.5 GHz	< –142 dBm, –148 dBm (typ.)
	7.5 GHz to 8 GHz	< –135 dBm, –142 dBm (typ.)
	RF preselection = on ³	
	1 MHz to 10 MHz	< –155 dBm, –160 dBm (typ.)
	10 MHz to 3 GHz	< –161 dBm, –165 dBm (typ.)
	3 GHz to 3.6 GHz	< –158 dBm, –162 dBm (typ.)
	3.6 GHz to 6 GHz	< –154 dBm, –158 dBm (typ.)
	6 GHz to 8 GHz	< –150 dBm, –156 dBm (typ.)
Immunity to interference (nominal values)		
Image frequencies	$f_{in} - 2 \times 21.4$ MHz	–70 dBc
	$f_{in} - 2 \times 830.4$ MHz	–80 dBc
	$f_{in} - 2 \times 4875.4$ MHz	–90 dBc
Intermediate frequencies	21.4 MHz	–60 dBc
	830.4 MHz, 4875.4 MHz, 8920.4 MHz	–80 dBc
Spurious response, inherent	input matched to 50 Ω , without input signal, RF attenuation = 0 dB	
	RF preselection = off, RBW $\leq$ 30 kHz	< –90 dBm
	RF preselection = on ³ , RBW $\leq$ 3 kHz	< –100 dBm
Other interfering signals	signal level – RF attenuation < –30 dBm, RF preselection = off	
	10.7 MHz	–60 dBc
	2437.7 MHz	–60 dBc
	signal level – RF attenuation < –30 dBm, RF preselection = off, RF $\leq$ 3.6 GHz	
	spurious at $f_{in} - 2437.7$ MHz	–80 dBc
	signal level – RF attenuation < –40 dBm, RF preselection = off, RF $\geq$ 3.6 GHz	
	4460.2 MHz	–40 dBc
Spurious response, related to local oscillators	$f_{in} \leq 3.6$ GHz	
	$\Delta f < 300$ kHz	–60 dBc
	$\Delta f \geq 300$ kHz	< –60 dBc
	$f_{in} > 3.6$ GHz	
	$\Delta f < 300$ kHz	–54 dBc
	$\Delta f \geq 300$ kHz	< –54 dBc

³ R&S®ETH-K1 option required.

Level display		
Logarithmic level axis		1/2/5/10/20/50/100/120/150 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max. peak, min. peak, auto peak, sample, RMS
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		–80 dBm to +20 dBm
Units of level axis		dBm, dBmV, dBμV, V, W
Level measurement uncertainty		
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, S/N > 16 dB, 0 dB to –50 dB below reference level, RF attenuation = auto, RF preselection = off	
	10 MHz < f ≤ 3.6 GHz	< 1 dB, 0.5 dB (typ.)
	3.6 GHz < f ≤ 8 GHz	< 1.5 dB, 1 dB (typ.)
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	1 MHz ≤ f ≤ 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f ≤ 3.6 GHz	< 1 dB
	3.6 GHz < f ≤ 8 GHz	< 1.5 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		< 0.1 dB (nom.)
Display nonlinearity	S/N > 16 dB, 0 dB to –50 dB, logarithmic level display	< 0.2 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	< 0.1 dB (nom.)

Trigger functions

Trigger		
Trigger source		free run, video, external
External trigger level threshold	low → high transition	
	high → low transition	

Scalar network analysis

Frequency range	model .14 model .18	100 kHz to 3.6 GHz 100 kHz to 8 GHz
Resolution		1 Hz
Data points		631
Tracking generator (TG) output power	tracking generator attenuation = 0 dB	0 dBm (nom.)
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Transmission measurement		
Magnitude	range	1/2/5/10/20/50/100/120/150 dB, linear 100 %, selectable
	resolution	0.01 dB
Dynamic range for transmission measurements	RF attenuation = 10 dB, TG attenuation = 10 dB, RBW = 1 kHz, RF preselection = off	
	100 kHz ≤ f < 300 kHz	> 60 dB (nom.), 80 dB (typ.)
	300 kHz ≤ f < 3.6 GHz	> 70 dB (nom.), 90 dB (typ.)
	3.6 GHz ≤ f < 6 GHz	> 60 dB (nom.), 80 dB (typ.)
Reflection measurement		
with external R&S®FSH-Z3 or R&S®FSH-Z2 VSWR bridge		
Return loss	range	1/2/5/10/20/50/100/120/150 dB, linear 100 %, selectable
	resolution	0.01 dB
VSWR	range	1 to 1.1/1.5/2/6/11/21/71
Reflection coefficient	range	1 mp to 1000 mp in 1, 2, 5 steps
Directivity of R&S®FSH-Z3	30 MHz to 3 GHz	28 dB
	3 GHz to 6 GHz	25 dB
Return loss at R&S®FSH-Z3 test port	50 MHz to 6 GHz	22 dB
Directivity of R&S®FSH-Z2	10 MHz to 1 GHz	30 dB
	1 GHz to 3 GHz	25 dB
Return loss at R&S®FSH-Z2 test port	10 MHz to 3 GHz	20 dB

Vector network analysis

Option R&S®FSH-K42 vector reflection and transmission measurement must be installed.

Frequency range	model .14 model .18	100 kHz to 3.6 GHz 100 kHz to 8 GHz
Resolution		1 Hz
Data points		631
Tracking generator output power	tracking generator attenuation = 0 dB	0 dBm (nom.)
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Transmission measurement		
Magnitude	range	1/2/5/10/20/50/100/120/150 dB, linear 100 %, selectable
	resolution	0.01 dB
Phase	range	80/180/360/1000° to 10000° in 1, 2, 5 steps
	resolution	0.01°
Group delay	range	10 ns to 1000 ns in 1, 2, 5 steps
Dynamic range for transmission measurements	RF attenuation = 10 dB, TG attenuation = 10 dB, RBW = 1 kHz, RF preselection = off	
	100 kHz ≤ f < 300 kHz	> 60 dB (nom.), 80 dB (typ.)
	300 kHz ≤ f < 3.6 GHz	> 70 dB (nom.), 90 dB (typ.)
	3.6 GHz ≤ f < 6 GHz	> 60 dB (nom.), 80 dB (typ.)
Reflection measurement		
with external R&S®FSH-Z3 or R&S®FSH-Z2 VSWR bridge		
Return loss	range	1/2/5/10/20/50/100/120/150 dB, linear 100 %, selectable
	resolution	0.01 dB
One-port phase	range	80/180/360/1000° to 10000° in 1, 2, 5 steps
	resolution	0.01°
Group delay	range	10 ns to 1000 ns in 1, 2, 5 steps
VSWR	range	1 to 1.1/1.5/2/6/11/21/71
Reflection coefficient	range	1 mV to 1000 mV in 1, 2, 5 steps
Smith chart	range	1, zoom ×2, ×4, ×8
Cable loss	range	1 dB to 100 dB in 1, 2, 5 steps
Directivity of R&S®FSH-Z3, corrected	2 MHz to 3 GHz	40 dB
	3 GHz to 6 GHz	37 dB
Return loss at R&S®FSH-Z3 test port, corrected	2 MHz to 3 GHz	40 dB
	3 GHz to 6 GHz	37 dB
Directivity of R&S®FSH-Z2, corrected	2 MHz to 10 MHz	40 dB
	10 MHz to 3 GHz	43 dB
Return loss at R&S®FSH-Z2 test port, corrected	2 MHz to 3 GHz	35 dB

Distance-to-fault measurement

Option R&S®FSH-K41 distance-to-fault (DTF) measurement must be installed.

Return loss	range	1/2/5/10/20/50/100/120/150 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
	resolution	0.01
Reflection coefficient	range	1 to 1000 mV in 1, 2, 5 steps
Distance-to-fault resolution		(1.5 × velocity factor/span) m
Maximum permissible spurious signal		0 dBm (nom.)

Inputs and outputs

RF input		
Impedance		50 Ω
Connector		N female
VSWR (nominal values)	RF input attenuation ≥ 10 dB	
	20 MHz $< f \leq 1.5$ GHz	< 1.5 (typ.)
	1.5 GHz $< f \leq 6$ GHz	< 2 (typ.)
	6 GHz $< f \leq 8$ GHz	< 3 (typ.)
RF input attenuator	RF preselection = off	0 dB to 40 dB in 5 dB steps
	RF preselection = on ⁴	0 dB to 50 dB in 5 dB steps
Tracking generator output		
Frequency range	model .14	100 kHz to 3.6 GHz
	model .18	100 kHz to 8 GHz
Connector		N female, 50 Ω
VSWR (nominal values)	100 kHz $\leq f \leq 3$ GHz	< 1.5 (typ.)
	3 MHz $\leq f \leq 6$ GHz	< 2 (typ.)
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Maximum rated reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μ s)		1 mWs
External reference input, external trigger input		
Connector		BNC female, 50 Ω
Mode	selectable	external reference, external trigger
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low $\rightarrow$ high transition	2.4 V
	high $\rightarrow$ low transition	0.7 V
TS ASI output	available in TV analyzer measurement modes: 'measurement list', 'constellation diagram', echo pattern, MER(k)	
Connector		BNC female, 50 Ω
Output impedance		75 Ω
Output level, peak-to-peak	on 75 Ω load	0.8 V
Data rate		270 Mbit/s
Accessories interface		
Connector		7-contact female (Binder 712)
Accessories supported		see accessories
AUX interface		
Connector		7-contact female (Binder 712)
LAN interface		10/100BaseT, RJ-45
USB interface		mini B plug, version 1.1
SD card interface		SD card and SDHC card

⁴ R&S®ETH-K1 option required.

General data

Operating languages		English, Russian, Spanish, Portuguese, Japanese
Remote control (R&S®ETH-K40 option)		
Command set		SCPI 1997.0
LAN interface		10/100BaseT, RJ-45
USB		mini B plug, version 1.1
Display		
Resolution		640 × 480 pixel
Audio		
Speaker		internal
Mass memory		
Mass memory		flash memory (internal) SD card (not supplied) USB memory stick (not supplied)
Data storage	internal	> 256 instrument settings and traces
	on 2 Gbyte SD card or USB memory stick	> 10000 instrument settings and traces
Temperature	operating temperature range	0 °C to +50 °C
	storage temperature range	−40 °C to +70 °C
	battery charging mode	0 °C to +40 °C
Climatic loading	relative humidity	+25 °C/+40 °C at 95 % relative humidity, IEC 60068-2-30, MIL-PRF-28800
	IP class of protection	51
	with R&S®HA-Z222 carrying holster and rain cover	54
Mechanical resistance		
Vibration	sinusoidal	IEC 60068-2-6
	random	IEC 60068-2-64
Shock		40 g shock spectrum, MIL-STD-810E, method 516.4, procedure 1, IEC 60068-2-27
Power supply		
R&S®HA-Z201 plug-in AC power supply	input specifications	100 V to 240 V AC, 50 Hz to 60 Hz, 700 mA
	output specifications	15 V DC, 2 A
	operating temperature range	0 °C to +40 °C
	storage temperature range	−40 °C to +70 °C
	test mark	VDE or SIQ, CE, UL, PSE
External DC voltage		14 V to 16 V
Internal battery		lithium-ion battery
Capacity	R&S®HA-Z206	6.75 Ah
Voltage		7.2 V (nom.)
Operating time with new, fully charged battery	TV analyzer mode	2.5 h
	spectrum analyzer mode	4.5 h
Charging time	instrument switched off or R&S®HA-Z203 battery charger	3.5 h
	instrument switched on	
	TV analyzer mode	7.5 h
	spectrum analyzer mode	4.5 h
Life time	charging cycles	> 500
Power consumption	TV analyzer mode	19.5 W
	spectrum analyzer mode	12 W
Safety		IEC 61010-1, EN 61010-1, UL 61010B-1, CSA C22.2 No. 61010-1
Test mark		VDE or SIQ, GS, CSA, CSA-NRTL
EMC		in line with European EMC Directive 2004/108/EC, including IEC/EN 61326 class B (emission), CISPR 11/EN 55011/group 1 class B (emission), IEC/EN 61326 table A.1 (immunity, industrial)
Dimensions (W × H × D)	with handle	194 mm × 300 mm × 144 mm (7.6 in × 11.8 in × 5.7 in)
	without handle	194 mm × 300 mm × 69 mm (7.6 in × 11.8 in × 2.8 in)
Weight		3.3 kg (6.6 lb)
Recommended calibration interval		1 year

Accessories



R&S®FSH-Z1 and R&S®FSH-Z18 power sensors

Frequency range	R&S®FSH-Z1	10 MHz to 8 GHz
	R&S®FSH-Z18	10 MHz to 18 GHz
VSWR	10 MHz to 30 MHz	< 1.15
	30 MHz to 2.4 GHz	< 1.13
	2.4 GHz to 8 GHz	< 1.20
	8 GHz to 18 GHz	< 1.25
Maximum input power	average power	400 mW (+26 dBm)
	peak power (< 10 µs, 1 % duty cycle)	1 W (+30 dBm)
Measurement range		200 pW to 200 mW (–67 dBm to +23 dBm)
Signal weighting		average power
Effect of harmonics		< 0.5 % (0.02 dB) at harmonic ratio of 20 dB
Effect of modulation		< 1.5 % (0.07 dB) for continuous digital modulation
Absolute measurement uncertainty	sine signals, no zero offset	
10 MHz to 8 GHz	+15 °C to +35 °C	< 2.3 % (0.10 dB)
	0 °C to +50 °C	< 4.2 % (0.18 dB)
8 GHz to 18 GHz	+15 °C to +35 °C	< 3.5 % (0.15 dB)
	0 °C to +50 °C	< 5.0 % (0.21 dB)
Zero offset after zeroing		< 110 pW
General data		
Dimensions	W × H × D	48 mm × 31 mm × 170 mm (1.9 in × 1.22 in × 6.7 in)
	connecting cable	1.5 m (59 in)
Weight		< 0.3 kg (0.66 lb)

R&S®FSH-Z14 directional power sensor


Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω		< 1.06
Power-handling capacity	depending on temperature and matching	100 W to 1000 W
Insertion loss		< 0.06 dB
Directivity		> 30 dB
Average power		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	2 CW carriers with identical power	±2 % of measured value (±0.09 dB)
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

Maximum peak envelope power		
Power measurement range		
Video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate $\geq 100/\text{s}$	
	video bandwidth 4 kHz	$\pm(3\% \text{ of measured value} + 0.05 \text{ W})$ starting from a burst width of 200 μs
	video bandwidth 200 kHz	$\pm(3\% \text{ of measured value} + 0.20 \text{ W})$ starting from a burst width of 4 μs
	video bandwidth 600 kHz	$\pm(7\% \text{ of measured value} + 0.40 \text{ W})$ starting from a burst width of 2 μs
	20/s $\leq$ repetition rate $< 100/\text{s}$ 0.001 $\leq$ duty cycle < 0.1	plus $\pm(1.6\% \text{ of measured value} + 0.15 \text{ W})$ plus $\pm 0.10 \text{ W}$
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)
Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		> 1.15
Minimum forward power	specs met from 0.4 W	0.06 W
General data		
Dimensions	W $\times$ H $\times$ D	120 mm $\times$ 95 mm $\times$ 39 mm (5.9 in $\times$ 3.74 in $\times$ 1.53 in)
	length of connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

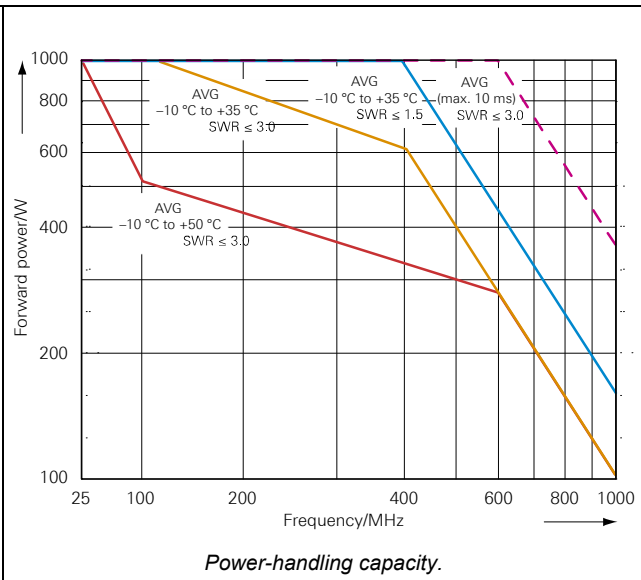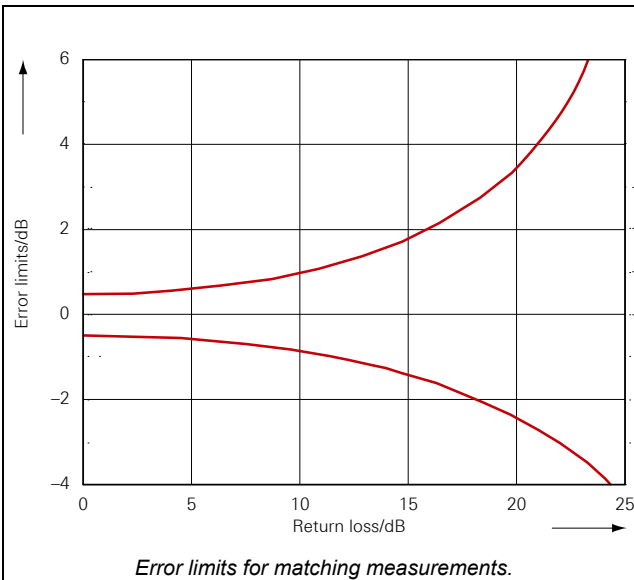

R&S®FSH-Z44 directional power sensor

Frequency range		200 MHz to 4 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07
	3 GHz to 4 GHz	< 1.12
Power-handling capacity	depending on temperature and matching	120 W to 1000 W
Insertion loss	200 MHz to 1.5 GHz	< 0.06 dB
	1.5 GHz to 4 GHz	< 0.09 dB
Directivity	200 MHz to 3 GHz	> 30 dB
	3 GHz to 4 GHz	> 26 dB
Average power		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset	
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	$\pi/4$ -DQPSK	±2 % of measured value (±0.09 dB)
Temperature coefficient	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)
Maximum peak envelope power		
Power measurement range	modulated carriers	
	video bandwidth = 4 kHz	0.4 W to 300 W
	video bandwidth = 200 kHz	1 W to 300 W
	video bandwidth = 4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate $\geq 100/s$	
	video bandwidth = 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 100 μs
	video bandwidth = 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs
	video bandwidth = 4 MHz	±(7 % of measured value + 0.40 W) starting from a burst width of 1 μs
	20/s $\leq$ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 $\leq$ duty cycle < 0.1	plus ±0.10 W
	burst width $\geq 0.5 \mu s$	plus ±5 % of measured value
	burst width $\geq 0.2 \mu s$	plus ±10 % of measured value
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)
Load matching		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specs met from 0.2 W	0.03 W
General data		
Dimensions	W $\times$ H $\times$ D	120 mm $\times$ 95 mm $\times$ 39 mm (5.9 in $\times$ 3.74 in $\times$ 1.53 in)
	length of connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

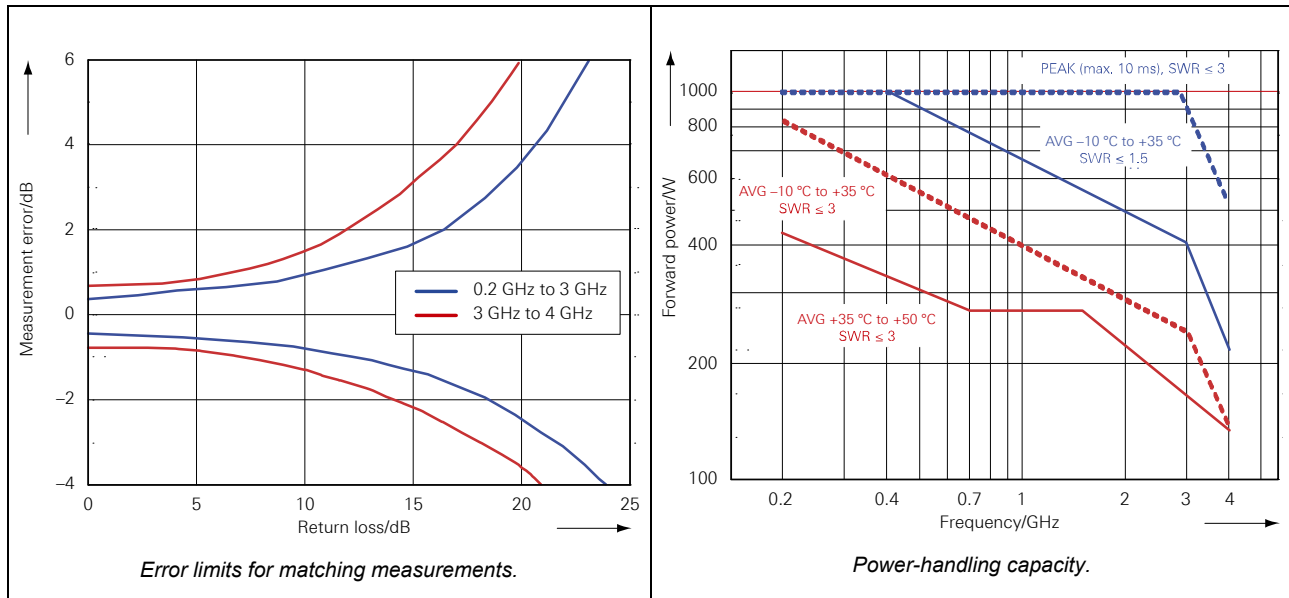

R&S®FSH-Z3 VSWR bridge

Frequency range		10 MHz to 6 GHz
Impedance		50 Ω
VSWR bridge		
Directivity	10 MHz to 30 MHz	16 dB (typ.)
	30 MHz to 3 GHz	> 20 dB, 28 dB (typ.)
	3 GHz to 6 GHz	> 16 dB, 25 dB (typ.)
Directivity, corrected (R&S®FSH-K42 option)	2 MHz to 3 GHz	40 dB (typ.)
	3 GHz to 6 GHz	37 dB (typ.)
Return loss at test port	10 MHz to 50 MHz	> 12 dB, 18 dB (typ.)
	50 MHz to 6 GHz	> 16 dB, 22 dB (typ.)
Return loss at test port, corrected (R&S®FSH-K42 option)	2 MHz to 3 GHz	40 dB (typ.)
	3 GHz to 6 GHz	37 dB (typ.)
Insertion loss at test port		9 dB (typ.)
Insertion loss of bypass		4 dB (typ.)
Connectors		
Generator input/RF output		N male
Test port		N female
Control interface		7-contact connector (Binder)
Calibration standards	R&S®FSH-Z28	short/open, 50 Ω load
Connector		N male
Impedance		50 Ω
Return loss	DC to 3 GHz	> 40 dB, 43 dB (typ.)
	3 GHz to 6 GHz	> 37 dB, 43 dB (typ.)
Power-handling capacity		1 W
General data		
Power consumption		500 mW
Dimensions	W × H × D	169 mm × 116 mm × 30 mm (6.7 in × 4.6 in × 1.2 in)
Weight		485 g (1.1 lb)

R&S®FSH-Z2 VSWR bridge

Frequency range		10 MHz to 3 GHz
Impedance		50 Ω
VSWR bridge		
Directivity	10 MHz to 1 GHz	30 dB (typ.)
	1 GHz to 3 GHz	25 dB (typ.)
Directivity, corrected (R&S®FSH-K42 option)	2 MHz to 10 MHz	40 dB (typ.)
	10 MHz to 3 GHz	43 dB (typ.)
Return loss at test port	10 MHz to 3 GHz	20 dB (typ.)
Return loss at test port, corrected (R&S®FSH-K42 option)	2 MHz to 3 GHz	35 dB (typ.)
Power divider		
Insertion loss	10 MHz to 3 GHz	10 dB (typ.)
Return loss at test port	10 MHz to 3 GHz	20 dB (typ.)
Connectors		
Generator input/RF output		N male
Test port		N female
Control interface		7-contact connector (Binder)
Calibration standards	R&S®FSH-Z29/-Z30/-Z31	short/open, 50 Ω load
Connector		N male
Impedance		50 Ω
Return loss	DC to 3 GHz	> 43 dB
Power-handling capacity		1 W
General data		
Dimensions	W × H × D	169 mm × 116 mm × 30 mm (6.7 in × 4.6 in × 1.2 in)
Weight		485 g (1.1 lb)

R&S®HA-Z240 GPS receiver

GPS location indication		latitude, longitude
Frequency counter uncertainty	GPS on, ≥ 1 minute after satellite lock	2.5×10^{-8}
	up to 30 minutes after losing satellite lock	5×10^{-8}
Operating temperature range		-20°C to $+55^{\circ}\text{C}$
Storage temperature range		-40°C to $+70^{\circ}\text{C}$
Climatic loading	GPS receiver module	IEC 60529 IPX7 level
Dimensions	$\varnothing \times H$	61 mm $\times$ 19.5 mm (2.4 in $\times$ 0.8 in)
Weight		200 g (0.4 lb)
Cable length		5 m (16.4 ft)
Connector		7-contact male (Binder 712)
Power consumption		0.45 W
Test marks		FCC, CE

Ordering information

Designation	Type	Order No.
Handheld TV Analyzer, up to 3.6 GHz, with tracking generator	R&S®ETH	2114.1508.14
Handheld TV Analyzer, up to 8 GHz, with tracking generator	R&S®ETH	2114.1508.18
Accessories supplied		
Battery pack, AC power supply, USB adapter, USB cable, LAN cable, quick reference guide and CD-ROM with R&S®ETHView PC software and documentation		

Options

Designation	Type	Order No.
DVB-T/DVB-H Analysis	R&S®ETH-K140	2114.1708.02
ISDB-T Analysis	R&S®ETH-K160	2114.1743.02
RF Preselection, up to 3.6 GHz	R&S®ETH-K1	2114.1608.04
RF Preselection, up to 8 GHz	R&S®ETH-K1	2114.1608.08
Remote Control via LAN or USB	R&S®ETH-K40	2114.1814.02
Distance-to-Fault Measurement	R&S®FSH-K41	1304.5612.02
Vector Reflection and Transmission Measurement	R&S®FSH-K42	1304.5629.02
Broadcast Drive Test Software	R&S®BCDRIVE	2115.1360.03

Service options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty, three years	R&S®WE3	
Extended Warranty, four years	R&S®WE4	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Calibration Coverage, three years	R&S®CW3	
Extended Warranty with Calibration Coverage, four years	R&S®CW4	

Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge ⁵. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ⁵ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

⁵ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Accessories

Designation	Type	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
VSWR Bridge and Power Divider, 10 MHz to 3 GHz	R&S®FSH-Z22	1145.5767.02
VSWR Bridge with DC Bias and Bypass Switch, 10 MHz to 6 GHz	R&S®FSH-Z3	1300.7756.02
Combined Open/Short/50 Ω Load Calibration Standard, DC to 8 GHz	R&S®FSH-Z28	1300.7810.03
Combined Open/Short/50 Ω Load Calibration Standard, DC to 3.6 GHz	R&S®FSH-Z29	1300.7510.03
Matching Pad 75 Ω, L section	R&S®RAM	0358.5414.02
Matching Pad 75 Ω, L section, N to BNC	R&S®FSH-Z38	1300.7740.02
Matching Pad 75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Spare Power Supply, incl. mains plug for EU, GB, US	R&S®HA-Z201	1309.6100.00
12 V Car Adapter for cigarette lighter	R&S®HA-Z202	1309.6117.00
Battery Charger for lithium-ion battery pack	R&S®HA-Z203	1309.6123.00
Lithium-Ion Battery Pack, 6.75 Ah	R&S®HA-Z206	1309.6146.00
Spare Ethernet Cable, length: 1.5 m	R&S®HA-Z210	1309.6152.00
Spare USB Cable, length: 1.5 m, A/mini B connector	R&S®HA-Z211	1309.6169.00
Soft Carrying Bag	R&S®HA-Z220	1309.6175.00
Hard Case	R&S®HA-Z221	1309.6181.00
Carrying Holster, including chest harness and rain cover	R&S®HA-Z222	1309.6198.00
SD Memory Card, 2 Gbyte	R&S®HA-Z232	1309.6223.00
GPS Receiver	R&S®HA-Z240	1309.6700.02
Isotropic Antenna, 30 MHz to 3 GHz	R&S®TS-EMF	1158.9295.13
Active Directional Antenna, 20 MHz to 7.5 GHz	R&S®HE-300	4067.5900.02
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02

For product brochure, see PD 5213.9592.12 and www.rohde-schwarz.com

Service that adds value

- ▮ Worldwide
- ▮ Local and personalized
- ▮ Customized and flexible
- ▮ Uncompromising quality
- ▮ Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group is a leading supplier of solutions in the fields of test and measurement, broadcasting, secure communications, and radiomonitoring and radiolocation. Founded more than 80 years ago, this independent global company has an extensive sales network and is present in more than 70 countries. The company is headquartered in Munich, Germany.

Sustainable product design

- ▮ Environmental compatibility and eco-footprint
- ▮ Energy efficiency and low emissions
- ▮ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- ▮ Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- ▮ North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- ▮ Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- ▮ Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- ▮ China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5213.9592.22 | Version 10.01 | November 2014 (sk)

R&S®ETH Handheld TV Analyzer

Data without tolerance limits is not binding | Subject to change

© 2008 - 2014 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5213959222