

Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as spectrum analyzers, signal generators, oscilloscopes, power meters, logic analysers etc from all the major suppliers such as Agilent, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. As such, we fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 2 year warranty. Our staff have extensive backgrounds in T&M, totalling over 150 years of combined experience, which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, covering the cost of warranty returns BOTH ways (plus supplying a loan unit, if available) and supplying a free business tool with every order.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based near Heathrow Airport in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test equipment Solutions Ltd
Unit 8 Elder Way
Waterside Drive
Langley
Berkshire
SL3 6EP

T: +44 (0)1753 596000
F: +44 (0)1753 596001

Email: info@TestEquipmentHQ.com
Web: www.TestEquipmentHQ.com



Spectrum Master™

High Performance Handheld Spectrum Analyzer

MS2723B

9 kHz to 13 GHz

Introduction

Anritsu's high performance handheld spectrum analyzer provides the wireless professional the performance needed for the most demanding measurements in harsh RF and physical environments. Whether it is for spectrum monitoring, broadcast proofing, interference analysis, RF and microwave measurements, regulatory compliance, or Wi-Fi and wireless network measurements, the Spectrum Master is the ideal instrument to making fast and reliable measurements.

Spectrum and Interference Analyzer Highlights

- Measure: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI
- Dynamic Range: > 101 dB in 1 Hz RBW
- DANL: -159 dBm in 1 Hz RBW
- Phase Noise: -95 dBc/Hz @ 10 kHz offset at 1 GHz
- Frequency Accuracy: < ± 25 ppb with GPS On
- 1 Hz to 3 MHz Resolution Bandwidth (RBW)
- Traces: Normal, Max Hold, Min Hold, Average, # of Averages
- Detectors: Peak, Negative, Sample, Quasi-peak, and true RMS
- Markers: 6, each with a Delta Marker, or 1 Reference with 6 Deltas
- Limit Lines: up to 40 segments with one-button envelope creation
- Trace Save-on-Event: crossing limit line or sweep complete

Capabilities and Functional Highlights

- LTE, GSM/EDGE
- W-CDMA/HSDPA
- TD-SCDMA/HSDPA
- CDMA, EV-DO
- WiMAX - Fixed, Mobile
- AM/FM/SSB Demodulator
- Zero-span IF Output
- Gated Sweep
- GPS tagging of stored traces
- Internal Preamplifier standard
- High Accuracy Power Meter
- 4, 6, 8, 18 GHz USB Sensors
- Channel Scanner
- 8.4" Display
- < 5 minute warm-up time
- 2.3 hour battery operation time
- Ethernet/USB Data Transfer
- MST Remote Access Tool



Spectrum Master™ MS2723B Spectrum Analyzer

Handheld Size: 315 mm x 211 mm x 77 mm (12.4 in x 8.3 in x 3.0 in), Lightweight: 3.4 kg (7.5 lbs)

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



Spectrum Analyzer

Measurements

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m ² or dBmV/m) Occupied Bandwidth (measures 99% to 1% power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, upper/lower SSB), (audio out only) C/I (carrier-to-interference ratio) Emission Mask (recall limit lines as emission mask)
--------------------	---

Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Limit Lines, Screen Shots Jpeg (save only), Save-on-Event
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB CF, Copy
Application Options	Impedance (50 Ω , 75 Ω , Other)

Sweep Functions

Sweep	Single/Continuous, Manual Trigger, Reset, Detection, Minimum Sweep Time, Trigger Type, Gated Sweep (see Option 0090)
Detection	Peak, RMS, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Change Position, Manual

Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A \rightarrow B, B \leftarrow C, Max Hold, Min Hold
Trace C Operations	A \rightarrow C, B \leftarrow C, Max Hold, Min Hold, A - B \rightarrow C, B - A \rightarrow C, Relative Reference (dB), Scale

Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency offset and amplitude

Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Number of Points (41), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

Frequency

Frequency Range	9 kHz to 13 GHz (usable to 0 Hz), Preamp 100 kHz to 4 GHz
Tuning Resolution	1 Hz
Frequency Reference	Aging: ± 1.0 ppm/10 years Accuracy: ± 0.3 ppm (25 $^{\circ}$ C ± 25 $^{\circ}$ C) + aging
Frequency Span	10 Hz to 13 GHz including zero span
Span Accuracy	Same as frequency reference accuracy
Sweep Time	10 μ s to 600 seconds in zero span, autoset in non-zero span
Sweep Time Accuracy	$\pm 2\%$ in zero span

Bandwidth

Resolution Bandwidth (RBW)	1 Hz to 3 MHz in 1-3 sequence $\pm 10\%$ (1 MHz max in zero-span) (-3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 KHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



Spectrum Analyzer (continued)

Spectral Purity

SSB Phase Noise	-95 dBc/Hz @ 10, 20 and 30 kHz offset from carrier -97 dBc/Hz @ 100 kHz offset from carrier -105 dBc/Hz @ 1 MHz offset from carrier -120 dBc/Hz @ 10 MHz offset from carrier
-----------------	---

Amplitude Ranges

Dynamic Range	> 101 dB @ 2.4 GHz, 2/3 (TOI-DANL) in 1 Hz RBW
Measurement Range	DANL to +30 dBm
Display Range	1 to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-120 dBm to +30 dBm
Attenuator Resolution	0 to 65 dB, 5.0 dB steps
Amplitude Units	Log Scale Modes: dBm, dBV, dBmV, dBμV Linear Scale Modes: nV, μV, mV, V, kV, nW, μW, mW, W, kW

Amplitude Accuracy (single sine wave input < Ref level, and > DANL, auto attenuation, 50 Ω Source)

20 °C to 30 °C	± 1.3 dB, after 30 minute warm-up > 4 GHz add ± 1.4 dB
-10 °C to 50 °C	Add ± 1.2 dB, after 60 minute warm-up

Displayed Average Noise Level (DANL) (RMS detection, Ref Level = -20 dBm for preamp Off and -50 dBm for preamp On)

(DANL in 1 Hz RBW, 0 dB attenuation)	Preamp Off
10 MHz to 4 GHz	-139 dBm
> 4 GHz to 10 GHz	-136 dBm
> 10 GHz to 13 GHz	-130 dBm
> 13 GHz to 20 GHz	-136 dBm
	Preamp On
10 MHz to 1 GHz	-159 dBm
> 1 GHz to 3 GHz	-156 dBm
> 3 GHz to 4 GHz	-154 dBm

Spurs

Residual Spurs	Preamp Off (RF input terminated, 0 dB input attenuation) -90 dBm Preamp On (RF input terminated, 0 dB input attenuation) -100 dBm
Input-Related Spurious	(0 dB attenuation, -30 dBm input, span < 1.7 GHz, carrier offset > 4.5 MHz) -60 dBc, -70 dBc typical
Exceptions	-50 dBc @ 3275 MHz

Third-Order Intercept (TOI)

	(-20 dBm tones 100 kHz apart, -20 dBm Ref level, 0 dB input attenuation, preamp Off)
2.4 GHz	+12 dBm
50 MHz to 500 MHz	> +6 dBm typical
> 500 MHz to 2000 MHz	> +8 dBm typical
> 2000 MHz to 6000 MHz	> +10 dBm typical
> 6000 MHz to 20000 MHz	> +12 dBm typical

Second Harmonic Distortion

	Preamp Off
50 MHz to 500 MHz	-50 dBc
> 500 MHz to 800 MHz	-45 dBc
> 800 MHz to 3000 MHz	-60 dBc
> 3000 MHz	-80 dBc

VSWR

> 10 dB input attenuation	1:5:1 typical
---------------------------	---------------

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

GPS Receiver Option (Option 0031) (includes antenna)

Setup	On/Off, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy	Spectrum Analyzer, Interference Analyzer, Signal Analyzer
when GPS Antenna is connected	<±25 ppb with GPS On, 3 minutes after satellite lock in selected mode
GPS Lock – after antenna is disconnected	<±50 ppb for 3 days, 0 °C to 50 °C ambient temperature
Connector	BNC, female, reverse polarity



High Accuracy Power Meter (Option 0019) (Requires external USB Power Sensor(s))

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	# of Running Averages, Max Hold
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)
Limits	Limit On/Off, Limit Upper/Lower

Power Sensor Model	PSN50	MA24104A	MA24106A	MA24108/18/26A
Description	High Accuracy RF Power Sensor	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor
Frequency Range	50 MHz to 6 GHz	600 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8 GHz (MA24108A) 10 MHz to 18 GHz (MA24118A) 10 MHz to 26 GHz (MA24126A)
Connector	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (MA24108/18A) Type K(m), 50 Ω (MA24126A)
Dynamic Range	-30 dBm to +20 dBm (.001 mW to 100 mW)	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)
VBW	100 Hz	100 Hz	100 Hz	50 kHz
Measurand	True-RMS	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power
Measurement Uncertainty	± 0.16 dB ¹	± 0.17 dB ²	± 0.16 dB ¹	± 0.18 dB ³
Datasheet (for complete specifications)	11410-00414	11410-00483	11410-00424	11410-00504
Notes:	1) Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors. 2) Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor. 3) Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.			

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



Interference Analyzer (Option 0025)

Measurements	Spectrum Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I) Spectrogram (Collect data up to one week) Signal Strength (Gives visual and aural indication of signal strength) Received Signal Strength Indicator (RSSI) (collect data up to one week) Gives visual and aural indication of signal strength Signal ID (up to 12 signals) Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers
Application Options	Signal-to-Noise Ratio (SNR) > 10 dB Impedance (50 Ω , 75 Ω , Other)



Channel Scanner (Option 0027)

Number of Channels	1 to 20 Channels (Power Levels)
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Frequency/Channel, Current/Maximum, Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Application Options	Impedance (50 Ω , 75 Ω , Other)

Gated Sweep (Option 0090)

Mode	Spectrum Analyzer, Sweep
Trigger	External TTL
Setup	Gated Sweep (On/Off) Gate Polarity (Rising, Falling) Gate Delay (0 to 65 ms typical) Gate Length (1 μ s to 65 ms typical) Zero Span Time

Zero Span IF Output (Option 0089)

Mode	Spectrum Analyzer/Span/Zero Span
Center Frequency	37.8 MHz
IF Bandwidth	7 MHz, 10 MHz, 16 MHz, typical
Output Power Level	-20 dBm to -45 dBm Typical given: RF Input = +30 dBm to -43 dBm with Preamp OFF -40 dBm to -60 dBm with Preamp ON Reference Level set at RF Input Level Auto RF Attenuation
RF Attenuation	Auto
Connector	BNC female

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



GSM/GPRS/EDGE Signal Analyzers (Options 0040, 0041)

Measurements

RF (Option 0040)	Demodulation (Option 0041)	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC) Multi-channel Spectrum Power vs. Time (Frame/Slot) Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC)	Phase Error EVM Origin Offset C/I Modulation Type Magnitude Error BSIC (NCC, BCC)	There are no additional OTA Measurements. RF Measurements and Demodulation can be made OTA	Measurements Channel Power Occupied Bandwidth Burst Power Average Burst power Frequency Error Phase Error EVM Origin Offset C/I Magnitude Error Script Master™

Setup Parameters

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screen	Overall Measurements

RF Measurements (Option 0040)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Occupied Bandwidth	Bandwidth within which 99% of the power transmitted on a single channel lies
Burst Power Error	± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)

Demodulation (Option 0041)

GSMK Modulation Quality (RMS Phase)	
Measurement Accuracy	± 1 deg
Residual Error (GSMK)	1 deg
8 PSK Modulation Quality (EVM)	
Measurement Accuracy	$\pm 1.5\%$
Residual Error (8 PSK)	2.5%

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



W-CDMA/HSDPA Signal Analyzers (Options 0044, 0045 or 0065, 0035)

Measurements			
RF (Option 0044)	Demodulation (Option 0045 or 0065)	Over-the-Air (OTA) (Option 0035)	Pass/Fail (User Editable)
Band Spectrum Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Single carrier ACLR Multi-carrier ACLR RF Summary	Code Domain Power Graph P-CPICH Power Channel Power Noise Floor EVM Carrier Feed Through Peak Code Domain Error Carrier Frequency Frequency Error Control Channel Power Abs/Rel/Delta Power CPICH, P-CCPCH S-CCPCH, PICH P-SCH, S-SCH HSDPA Power vs. Time Constellation Code Domain Power Table Code, Status EVM, Modulation Type Power, Code Utilization Power Amplifier Capacity Codogram Modulation Summary	Scrambling Code Scanner (Six) Scrambling Codes CPICH E _c /I _o E _c Pilot Dominance OTA Total Power Multipath Scanner (Six) Six Multipaths Tau Distance RSCP Relative Power Multipath Power	Measurements Max Output Power Frequency Error EVM CPICH Occupied Bandwidth Spectral Mask ACLR PCDE P-CCPCH S-CCPCH Code Spread 3 PICH Code 128 Script Master™ Test Models 1 (16), (32), (64) 2 3 (16), (32) 4 (+CPICH), (-CIPCH) 5 (2 HS), (4 HS), (8 HS)
Setup Parameters			
Scrambling Code, Threshold	Auto, Manual		
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average		
Maximum Spreading Factor	256, 512		
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel		
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)		
Marker	Six Markers, Table On/Off		
Sweep	Single/Continuous, Trigger Sweep		
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory		
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements		
RF Measurements (Option 0044)			
RF Channel Power Accuracy	± 1.25 dB, ± 0.7 dB typical, (temperature range 15 °C to 35 °C)		
Occupied Bandwidth Accuracy	± 100 kHz		
Adjacent Channel Leakage Ratio (ACLR)	-51 dB/-59 dB ± 0.8 dB @ 5 MHz/10 MHz offset, typical, Bands I – VI, VIII – XIV, XVII -51 dB/-57 dB ± 1.0 dB @ 5 MHz/10 MHz offset, typical, Band VII		
Demodulation (Option 0045 for W-CDMA only or 0065 for W-CDMA and HSDPA)			
W-CDMA Modulations	QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12.2 kbps)		
HSDPA Modulations	QPSK, 16 QAM, 64 QAM		
EVM Accuracy	± 2.5%, 6% ≤ EVM ≤ 25%		
Residual EVM	2.5% typical		
Code Domain Power	± 0.5 dB for code channel power > -25 dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)		
CPICH (dBm) Accuracy	± 0.8 dB typical		
Over-the-Air (OTA) Measurements (Option 0035)			
Scrambling Code Scanner	Six strongest Scrambling Codes		
Multipath Scanner	Six multipaths' power relative to strongest pilot		

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



cdmaOne/CDMA2000 1X Signal Analyzers (Option 0042, 0043, 0033)

Measurements

RF (Option 0042)	Demodulation (Option 43)	Over-the-Air (OTA) (Option 33)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Multi-carrier ACPR RF Summary	Code Domain Power Graph Pilot Power Channel Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Frequency Error Abs/Rel/ Power Pilot Page Sync Q Page Code Domain Power Table Code Status Power Multiple Codes Code Utilization Modulation Summary	Pilot Scanner (Nine) PN E_c/I_0 Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) E_c/I_0 Tau Channel Power Multipath Power Limit Test – 10 Tests Averaged Rho Adjusted Rho Multipath Pilot Dominance Pilot Power Pass/Fail Status	Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Mask Test Frequency Error Channel Frequency Frequency error Pilot Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Code Utilization Measured PN Pilot Dominance Multipath Power

Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth	1.23, 1.24, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0042)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)
---------------------------	---

Demodulation (Option 0043)

Frequency Error	± 10 Hz + time base error, 99% confidence level (in slow mode)
Rho Accuracy	± 0.005 , for Rho > 0.9
Residual Rho	> 0.995, typical, > 0.99 maximum, (RF input -50 dBm to +20 dBm)
PN Offset	1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 μ s typical, ± 1.0 μ s maximum

Over-the-Air (OTA) Measurements (Option 0033)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Six multipaths' power relative to strongest pilot
Limit Test	Average of ten tests compared to limit

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



CDMA2000 1xEV-DO Signal Analyzers (Option 0062, 0063, 0034)

Measurements			
RF (Option 0062)	Demodulation (Option 0063)	Over-the-Air (OTA) (Option 0034)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Power vs. Time Pilot & MAC Power Channel Power Frequency Error Idle Activity On/Off Ratio Spectral Emission Mask Multi-carrier ACPR RF Summary	MAC Code Domain Power Graph Pilot & MAC Power Channel Power Frequency Error Rho Pilot Rho Overall Data Modulation Noise Floor MAC Code Domain Power Table Code Status Power Code Utilization Data Code Domain Power Active Data Power Data Modulation Rho Pilot Rho Overall Maximum Data CDP Minimum Data CDP Modulation Summary	Pilot Scanner (Nine) PN E _c /I _o Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) E _c /I _o Tau Channel Power Multipath Power	Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Carrier Frequency Frequency Error Spectral Mask Noise Floor Pilot Power RMS Phase Error Tau Code Utilization Measured PN Pilot Dominance Multipath Power
Setup Parameters			
	PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset	
	Walsh Codes	64, 128	
	Measurement Speed	Fast, Normal, Slow	
	External Trigger Polarity	Rising, Falling	
	Slot Type	Auto, Active, Idle	
	Number of Carriers	1 to 5	
	Carrier Bandwidth	1.23, 1.24, 1.25 MHz	
	Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel	
	Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)	
	Sweep	Single/Continuous, Trigger Sweep	
	Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory	
	Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements	
RF Measurements (Option 0062)			
	RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)	
Demodulation (Option 0063)			
	EV-DO Compatibility	Rev 0 and Rev A	
	Frequency Error	± 20 Hz + time base error, 99% confidence level	
	Rho Accuracy	± 0.01, for Rho > 0.9	
	Residual Rho	> 0.995 typical, > 0.99, maximum (RF input -50 dBm to +20 dBm)	
	PN Offset	Within 1 × 64 chips	
	Pilot Power Accuracy	± 1.0 dB typical, relative to channel power	
	Tau	± 0.5 μs typical, ± 1.0 μs maximum	
Over-the-Air (OTA) Measurements (Option 0034)			
	Pilot Scanner	Nine strongest pilots	
	Multipath Scanner	Six multipaths' power relative to strongest pilot	

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



LTE Signal Analyzers (Options 0541, 0542, 0546)

Measurements

RF (Option 0541)	Modulation (Option 0542)	Over-the-Air (OTA) (Option 0546)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth ACPR RF Summary	Constellation Reference Signal Power Sync Signal Power EVM Frequency Error Carrier Frequency Cell ID Sector ID Group ID Control Channel Power RS P-SS S-SS PBCH PCFICH Modulation Summary	Synch Signal Power (Six Strongest) Power Cell ID Sector ID Group ID Dominance	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Channel Power Occupied Bandwidth ACLR Frequency Error Carrier Frequency Dominance EVM (peak) EVM (rms) RS Power SS Power P-SS Power S-SS Power PBCH Power PCFICH Power Cell ID Group ID Sector ID

Setup Parameters

Bandwidth	10 MHz
Span	1.4, 3, 5, 10, 15, 20, 30 MHz
Frame Length	2.5, 5.0, 10.0 msec
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0541)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)
---------------------------	---

Modulation (Option 0542)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Residual EVM (rms)	2.5% typical (E-UTRA Test Model 3.1) (RF Input -50 dBm to +10 dBm)

Over-the-Air (OTA) Measurements (Option 0546)

Scanner	Six strongest Sync Signals
Auto Save	Yes
GPS Tagging and Logging	Yes

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



Fixed and Mobile WiMAX Signal Analyzers (Options 0046, 0047, 0066, 0067, 0037)

Measurements			
RF (Option 0046 - Fixed) (Option 0066 - Mobile)	Demodulation (Option 0047 - Fixed) (Option 0067 - Mobile)	Over-the-Air (OTA) (Option 0037 - Mobile)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Power vs. Time Channel Power Preamble Power Downlink Burst Power (Mobile) Uplink Burst Power (Mobile) Data Burst Power (Fixed) Crest Factor (Fixed) ACPR RF Summary	Constellation RCE (RMS/Peak) EVM (RMS/Peak) Frequency Error CINR Base Station ID Sector ID Spectral Flatness Adjacent Subcarrier Flatness EVM vs. Subcarrier/Symbol RCE (RMS/Peak) EVM (RMS/Peak) Frequency Error CINR (Mobile) Base Station ID Sector ID (Mobile) DL-MAP (Tree View) (Mobile) Modulation Summary	Channel Power Monitor Preamble Scanner (Six) Preamble Relative Power Cell ID Sector ID PCINR Dominant Preamble Base Station ID	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Channel Power Occupied Bandwidth Downlink Bust Power Uplink Burst Power Preamble Power Crest Factor Frequency Error Carrier Frequency EVM RCE Sector ID (Mobile)
Setup Parameters			
Fixed WiMAX Bandwidth	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00 MHz		
Fixed WiMAX Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32		
Fixed WiMAX Span	5, 10, 15, 20 MHz		
Fixed WiMAX Frame Length	2.5, 5.0, 10.0 msec		
Mobile WiMAX Zone Type	PUSC		
Mobile WiMAX DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)		
Mobile WiMAX Bandwidths	3.50, 5.00, 7.00, 8.75, 10.00 MHz		
Mobile WiMAX Cyclic Prefix Ratio (CP)	1/8		
Mobile WiMAX Span	5, 10, 20, 30 MHz		
Mobile WiMAX Frame Lengths	5, 10 msec		
Mobile WiMAX Demodulation	Auto, Manual, FCH		
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel		
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range		
Sweep	Single/Continuous, Trigger Sweep		
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory		
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements		
RF Measurements (Option 0046 – Fixed, Option 0066 – Mobile)			
RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input –50 dBm to +20 dBm)		
Demodulated Signal Analyzer (Option 0047 – Fixed, Option 0067 – Mobile)			
Fixed Frequency Error	± 0.1 ppm + timebase error, 99% confidence level		
Mobile Frequency Error	± 0.02 ppm + timebase error, 99% confidence level		
Fixed WiMAX Residual EVM (rms)	3% typical, 3.5% maximum (RF Input –50 dBm to +20 dBm)		
Mobile WiMAX Residual EVM (rms)	2.5% typical, 3.0% maximum, (RF Input –50 dBm to +20 dBm)		
Over-the-Air (OTA) Measurements (Option 0037)			
Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 sec		
Preamble Scanner	Six Strongest Preambles		
Auto Save	Yes		
GPS Tagging and Logging	Yes		

Spectrum Master™ MS2723B Spectrum Analyzer Specifications



TD-SCDMA/HSDPA Signal Analyzers (Options 0060, 0061, 0038)

Measurements

RF (Option 0060)	Demodulation (Option 0061)	Over-the-Air (OTA) (Option 0038)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Left Channel Power Left Channel Occ B/W Right Channel Power Right Channel Occ B/W Power vs. Time Six Slot Powers Channel Power (RRC) DL-UL Delta Power UpPTS Power DwPTS Power On/Off Ratio Slot Peak-to-Average Power Spectral Emission RF Summary	Code Domain Power/Error (QPSK/8 PSK/16 QAM) Slot Power DwPTS Power Noise Floor Frequency Error Tau Scrambling Code EVM Peak EVM Peak Code Domain Error CDP Marker Modulation Summary	Code Scan (32) Scrambling Code Group Tau E_c/I_0 Pilot Dominance Tau Scan (Six) Sync-DL# Tau E_c/I_0 DwPTS Power Pilot Dominance Record Run/Hold	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Occupied Bandwidth Channel Power Channel Power RCC On/Off Ratio Peak-to-Average Ratio Frequency Error EVM Peak EVM Peak Code Domain Error Tau Carrier Feedthrough Noise Floor

Setup Parameters

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0-31
Scrambling/Midamble Code	Auto, 0-127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8 PSK, 16 QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0060)

RF Channel Power Accuracy (RRC)	± 1.5 dB, ± 1.0 dB typical, (slot power -40 to +10 dBm)
---------------------------------	---

Demodulation (Option 0061)

Supported Modulation	QPSK, 8 PSK, 16 QAM, MBMS
Residual EVM (rms)	3% typical, P-CCPH slot power > -50 dBm
PN Offset	Within 1 x 64 chips
Timing Error (Tau) for Dominant SYNC-DL	$\pm 0.2 \mu\text{s}$ (external trigger)
Spreading Factor	1, 16

Over-the-Air (OTA) Measurements (Option 0038)

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Tagging and Logging	Yes

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

General Specifications

All specifications and characteristics apply under the following conditions, unless otherwise stated: 1) After 5 minutes of warm-up time, where the instrument is left in the ON state; 2) All specifications apply when using internal reference; 3) All specifications subject to change without notice; 4) Typical performance is the measured performance of an average unit; 5) Recommended calibration cycle is 12 months.

Maximum Continuous Input	(≥ 10 dB input attenuation) +30 dBm
Input Damage Level	≥ 10 dB input attenuation, > +30 dBm, ± 50 Vdc
ESD Damage Level	(≥ 10 dB input attenuation) > 10 kV
External Reference Frequencies	1 MHz, 1.2288 MHz, 1.544 MHz, 2.048 MHz, 2.4576 MHz, 4.8 MHz, 4.9152 MHz, 5 MHz, 9.8304 MHz, 10 MHz, 13 MHz and 19.6608 MHz at -10 dBm to +10 dBm

Setup Parameters

System	Status (Temperature, Battery Info, S/N, Firmware Ver, IP Address, Options Installed) Self Test, Application Self Test GPS (see Option 0031)
System Options	Name, Date and Time, Ethernet Configuration, Brightness, Volume Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, User defined) Reset (Factory Defaults, Master Reset, Update Firmware)
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Screen Shots Jpeg (save only)
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy, Format USB
Internal Trace/Setup Memory	> 13,000 traces
External Trace/Setup Memory	Limited by size of USB Flash drive or Compact Flash module
Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode

Connectors

RF In	Type N, female, 50 Ω, Maximum Input + 30 dBm, ± 50 VDC
GPS	BNC, female, reverse polarity
External Power	5.5 mm barrel connector, 12 to 15 VDC, < 5.0 Amps
LAN Connection	RJ48C, 10/100 Mbps, Connect to PC or LAN for Remote Access
Compact Flash Interface	Type I
USB Interface	Type A, Connect Flash Drive and Power Sensor
USB Interface	5-pin mini-B, Connect to PC for data transfer
Headset	2.5 mm miniature phone plug
External Trigger In	BNC, female, 50 Ω, Maximum Input ± 5 VDC
IF Out	BNC, female, 50 Ω, 37.8 MHz

Display

Size	8.4"
Resolution	800 x 600

Battery

Type	Li-Ion
Battery Operation	2.5 hours, typical

Electromagnetic Compatibility

European Union	CE Mark, EMC Directive 89/336/EEC, 92/31/EEC, 93/68/EEC and Low Voltage Directive 73/23/EEC, 93/68/EEC
Australia and New Zealand	C-tick N274
Interference	EN 61326-1
Emissions	EN 55011
Immunity	EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-11

Safety

Safety Class	EN 61010-1 Class 1
Product Safety	IEC 60950-1 when used with Company supplied Power Supply

Environmental

Operating Temperature	-10 °C to 55 °C
Maximum Humidity	85%
Shock	MIL-PRF-28800F Class 2
Storage	-51 °C to 71 °C
Altitude	4600 meters, operating and non-operating

Size and Weight

Size	315 mm x 211 mm x 94 mm, (12.4 in x 8.3 in x 3.7 in)
Weight	3.4 kg, (7.5 lbs)

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

Master Software Tools (for your PC)

Database Management

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory
Trace Catalog	Index all traces into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files
DAT File Converter	Converts HHST files to MST file format and vice-versa

Data Analysis

Trace Math and Smoothing	Compare multiple traces
Data Converter	Convert from/to Return Loss/ VSWR/ Cable Loss/ DTF and also into Smith Charts
Measurement Calculator	Translates into other units

Report Generation

Report Generator	Includes GPS, power level, and calibration status along with measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML for PDF format
Export Measurements	Export measurements to *.s2p, *.jpg or *.csv format
Notes	Annotate measurements

Mapping (GPS Required)

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA Option	Google Earth, Google Maps, MapInfo

Folder Spectrogram (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

Folder Spectrogram – 2D View	Creates a composite file of multiple traces Peak Power, Total Power, Peak Frequency, Histogram, Average Power (Max/Min) File Filter (Violations over limit lines or deviations from averages) Playback
Video Folder Spectrogram – 2D View	Create AVI file to export for management review/reports
Folder Spectrogram – 3D View	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D View (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

List/Parameter Editors

Traces	Add, delete, and modify limit lines and markers
Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Product Updates	Auto-checks Anritsu website for latest revision firmware
Firmware Upload	Upload new firmware into the instrument
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
VSG Pattern Converter	Import user-defined patterns (ASCII text or MATLAB file format required)
Languages	Add up to two languages or modify non-English language menus
Mobile WiMAX	DL-MAP Parameters
Display	Modify display settings

Script Master™


















Channel Scanner Mode	Automate scan up to 1200 channels, repeat for sets of 20 channels, repeat all channels
GSM/GPRS/EDGE or W-CDMA/HSDPA Mode	Automate Signal Analysis testing requirements with annotated how-to pictures

Connectivity


Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements from PC to instrument
Firmware Updates	Product Update: download latest firmware version
Remote Access Tool	Remote control and monitoring of instrument (via Ethernet port) over the Internet

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

Ordering Information


	MS2723B	Description
	9 kHz to 13 GHz	Spectrum Analyzer
	Options	
	MS2723B-0031	GPS Receiver (includes antenna)
	MS2723B-0019	High-Accuracy Power Meter
	MS2723B-0025	Interference Analyzer
	MS2723B-0027	Channel Scanner
	MS2723B-0089	Zero-Span IF Output
	MS2723B-0090	Gated Sweep
	MS2723B-0009	I/Q Demodulation Hardware*
	MS2723B-0040	GSM/GPRS/EDGE RF Measurements*
	MS2723B-0041	GSM/GPRS/EDGE Demodulation*
	MS2723B-0044	W-CDMA/HSDPA RF Measurements*
	MS2723B-0045	W-CDMA Demodulation*
	MS2723B-0065	W-CDMA/HSDPA Demodulation*
	MS2723B-0035	W-CDMA/HSDPA Over-the-Air Measurements**
	MS2723B-0060	TD-SCDMA/HSDPA Measurements*
	MS2723B-0061	TD-SCDMA/HSDPA Demodulation*
	MS2723B-0038	TD-SCDMA/HSDPA Over-the-Air Measurements*
	MS2723B-0541	LTE RF Measurements*
	MS2723B-0542	LTE Modulation Measurements*
	MS2723B-0546	LTE Over-the-Air Measurements*
	MS2723B-0042	cdmaOne/CDMA2000 1X RF Measurements*
	MS2723B-0043	cdmaOne/CDMA2000 1X Demodulation*
	MS2723B-0033	cdmaOne/CDMA2000 1X Over-the-Air Measurements**
	MS2723B-0062	CDMA2000 1xEV-DO RF Measurements*
	MS2723B-0063	CDMA2000 1xEV-DO Demodulation*
	MS2723B-0034	CDMA2000 1xEV-DO Over-the-Air Measurements**
	MS2723B-0046	IEEE 802.16 Fixed WiMAX RF Measurements*
	MS2723B-0047	IEEE 802.16 Fixed WiMAX Demodulation*
	MS2723B-0066	IEEE 802.16 Mobile WiMAX RF Measurements*
	MS2723B-0067	IEEE 802.16 Mobile WiMAX Demodulation*
	MS2723B-0037	IEEE 802.16 Mobile WiMAX Over-the-Air Measurements
	MS2723B-0098	Standard Calibration to Z540
	MS2723B-0099	Premium Calibration to Z540 plus test data
		*Requires Option 0009, **Requires Option 0009, and Option 0031

Power Sensors (For complete ordering information see the respective datasheets of each sensor)

	Part Number	Description
	PSN50	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
	MA24104A	Inline High Power Sensor, 600 MHz to 4 GHz, + 51.76 dBm
	MA24106A	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm
	MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
	MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
	MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm


Spectrum Master™ MS2723B Spectrum Analyzer Specifications

Manuals (soft copy included on MST CD and at www.us.anritsu.com)

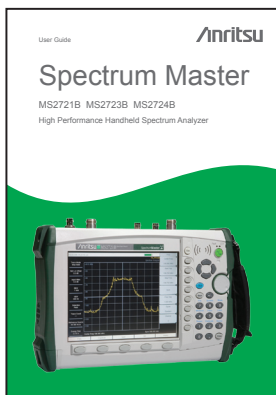

MS2723B	Description
10580-00175	Spectrum Master User Guide (Hard copy included) - Bias-Tee, GPS Receiver
10580-00231	Spectrum Analyzer Measurement Guide - Interference Analyzer, Channel Scanner, IF Output, Gated Sweep
10580-00240	Power Meter Measurement Guide - High Accuracy Power Meter
10580-00232	Signal Generator Measurement Guide - CW, Tracking, and Vector Signal Generator
10580-00234	3GPP Signal Analyzer Measurement Guide - GSM/EDGE, W-CDMA/HSDPA, TD-SCDMA/HSDPA, LTE
10580-00235	3GPP2 Signal Analyzer Measurement Guide - CDMA, EV-DO
10580-00236	WiMAX Signal Analyzer Measurement Guide - Fixed WiMAX, Mobile WiMAX
10580-00176	Programming Manual
10580-00177	Maintenance Manual

Troubleshooting Guides (soft copy included on MST CD and at www.us.anritsu.com)



11410-00472	Interference
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00463	W-CDMA/HSDPA Base Stations
11410-00465	TD-SCDMA/HSDPA Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations

Standard Accessories (included with instrument)



10580-00207	Spectrum Master User Guide (includes Bias-Tee and GPS Receiver)
2300-498	MST CD: Master Software Tools, User/Measurement Guides, Programming Manual, Troubleshooting Guides, Application Notes
65729	Soft Carrying Case
64343	Tilt Bail Stand Accessory
633-44	Rechargeable Li-Ion Battery
40-168-R	AC/DC Power Supply
806-141-R	Automotive Cigarette Lighter 12 Volt DC Adapter
3-806-152	Cat 5e Crossover Patch Cable, 7 feet/213 cm
2000-1371-R	Ethernet Cable, 7 feet/213 cm
3-2000-1498	USB A-mini B Cable, 10 feet/305 cm
2000-1520-R	USB Memory Drive
1091-27-R	Type-N male to SMA female adapter
1091-172	Type-N male to BNC female adapter
11410-00406	Spectrum Master™ MS2723B Technical Data Sheet One Year Warranty (Including battery, firmware, and software) Certificate of Calibration and Conformance

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

Optional Accessories

Directional Antennas



Part Number	Description
2000-1411-R	824 MHz to 896 MHz, N(f), 10 dBd, Yagi
2000-1412-R	885 MHz to 975 MHz, N(f), 10 dBd, Yagi
2000-1413-R	1710 MHz to 1880 MHz, N(f), 10 dBd, Yagi
2000-1414-R	1850 MHz to 1990 MHz, N(f), 9.3 dBd, Yagi
2000-1415-R	2400 MHz to 2500 MHz, N(f), 10 dBd, Yagi
2000-1416-R	1920 MHz to 2170 MHz, N(f), 10 dBd, Yagi
2000-1519-R	500 MHz to 3000 MHz, log periodic
2000-1617	600 MHz to 21000 MHz, N(f), 5-8 dBi to 12 GHz, 0-6 dBi to 21 GHz, log periodic

Portable Antennas



2000-1200	806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473	870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035	896 MHz to 941 MHz, SMA (m), 50 Ω (1/4 wave)
2000-1030	1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474	1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031	1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475	1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
2000-1032	2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361	2400 MHz to 2500, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1616	20 MHz to 21000 MHz, N(f), 50 Ω
61532	Antenna Kit (Consists of: 2000-1030, 2000-1031, 2000-1032-R, 2000-1200, 2000-1035, 2000-1361, and carrying pouch)

Bandpass Filters



1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA (f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA (f), 50 Ω
1030-105-R	890 MHz to 915 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA (f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz Band, 0.34 dB loss, N(m) to SMA(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA (f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω

Attenuators



3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 5 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

Spectrum Master™ MS2723B Spectrum Analyzer Specifications

Optional Accessories (continued)

Adapters



1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
1091-379-R	7/16 DIN(f) to 7/16 DIN(f), DC to 6 GHz, 50 Ω, w/ Reinforced Grip
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

Precision Adapters



34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

Miscellaneous Accessories



2000-1410	GPS Antenna, RP-BNC
69793	CW Signal Generator Kit
2000-1520-R	USB Flash Drive
3-200-1567	512 MB Compact Flash Card
2000-1374	External Charger for Li-Ion Batteries

Backpack and Transit Case



67135	Anritsu Backpack (For Handheld Instrument and PC)
760-243-R	Large Transit Case with Wheels and Handle





Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

• U.S.A.

Anritsu Company

1155 East Collins Boulevard, Suite 100,
Richardson, Texas 75081 U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27-1 Andar
01327-010 - Paraiso, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

16/18 Avenue du Québec-SILIC 720
91961 COURTABOEUF CEDEX, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

• Italy

Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 Kista, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

• Spain

Anritsu EMEA Ltd.

Oficina de Representación en España

Edificio Veganova
Avda de la Vega, nº 1 (edf 8, pl1, of 8)
28108 ALCOBENDAS - Madrid, Spain
Phone: +34-914905761
Fax: +34-914905762

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Branch Office

3rd Floor, Shri Lakshminarayan Niwas,
#2726, 80 ft Road, HAL 3rd Stage, Bangalore - 560 075, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P. R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• P. R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 2008, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 100004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

