# **Digital Phosphor Oscilloscopes**

TDS3000B Series



#### The TDS3000B Series of Digital Phosphor Oscilloscopes Provides Unmatched Performance and Portability at an Affordable Price

The TDS3000B Series packs the power of a DPO, digital real-time (DRT) sampling technology, WaveAlert waveform anomaly detection, OpenChoice documentation and analysis solutions and five applicationspecific modules into a lightweight, battery-capable design.

#### A DPO Provides a Greater Level of Insight into Complex Signals

The TDS3000B Series DPO delivers 3,600 wfms/s continuous waveform capture rate to capture glitches and infrequent events three times faster than comparable oscilloscopes. Some oscilloscope vendors claim high waveform capture rates for short bursts of time, but your oscilloscope needs to deliver these fast waveform capture rates on a continuous basis – saving minutes, hours or even days by quickly revealing the nature of faults so advanced triggers can be applied to isolate them. In addition, the TDS3000B DPO's real-time intensity grading highlights the details about the "history" of a signal's activity, making it easier to understand the characteristics of the waveforms you've captured.

#### Features & Benefits

100 to 500 MHz Bandwidths

5 GS/s Maximum Real-time Sample Rate, with sin(x)/x Interpolation

3,600 wfms/s Continuous Waveform Capture Rate

2 or 4 Channels

Full VGA Color LCD

25 Automatic Measurements

FFT Standard

Multi-language User Interface

QuickMenu Graphical User Interface for Easy Operation

WaveAlert<sup>®</sup> Automatic Waveform Anomaly Detection

OpenChoice<sup>®</sup> Solutions Simplify Instrument Control, Documentation and Analysis

- e\*Scope<sup>®</sup> Web-based Remote Control
- Built-in Ethernet Port
- GPIB, RS232, VGATDSPCS1 OpenChoice
- Software
- WaveStar<sup>™</sup> Software
- Integration with Third-party Software

### Application Modules for Specialized Analysis

- Advanced Analysis Module

- Limit Testing Module
- Telecommunications Mask Testing Module
- Extended Video Module
- 601 Serial Digital Video Module

Optional Internal Battery Operation Up to 3 Hours Without Line Power<sup>\*1</sup>

Plug-in Printer for Portable Documentation of Results

TekProbe<sup>®</sup> Interface Supports Active, Differential and Current Probes for Automatic Scaling and Units

#### Applications

Digital Design and Debug

Video Installation and Service

Power Supply Design

Education and Training

Telecommunications Mask Testing

Manufacturing Test

General Bench Test

\*1Temporarily not available




TDS3000B Series

#### Higher Speeds Demand Greater Bandwidth


You face faster clock rates and edge speeds, increasingly complex signals and mounting time-to-market pressures. The higher the bandwidth of your oscilloscope, the more accurate the reproduction of your signal. The TDS3000B Series offers a wide range of bandwidths from 100 MHz to 500 MHz to best suit the needs of your most demanding projects, so that you can complete your tasks on time and with confidence.

#### Quickly Debug and Characterize Signals with DRT Sampling Technology and sin(x)/x Interpolation

The TDS3000B Series combines unique digital real-time (DRT) sampling technology with sin(x)/x interpolation to allow you to accurately characterize a wide range of signal types on all channels simultaneously. This sampling technology makes it possible to capture high-frequency information, such as glitches and edge anomalies, that eludes other oscilloscopes in its class, while sin(x)/x interpolation ensures precise reconstruction of each waveform. The result – a complete view of your signal to speed debug and characterization.




The TDS3000B Series DPO provides unmatched insight into complex signal behavior, such as metastable events.




The TDS3054B's 5 GS/s real-time sample rate and sin(x)/x interpolation ensure accurate reconstruction of a 500 MHz sine wave.

#### Enhanced Troubleshooting Ability

WaveAlert® waveform anomaly detection speeds your troubleshooting tasks by helping you find those elusive problems faster. WaveAlert detection monitors the incoming signals on all channels and will detect and highlight any waveform that deviates from the normal waveform being




Even with 2 GS/s sample rate, which exceeds the Nyquist requirement of 2X oversampling, this 500 MHz oscilloscope with linear interpolation does not provide accurate reconstruction of the same 500 MHz sine wave.



WaveAlert waveform anomaly detection alerts you to any waveform that deviates from the "normal" input, such as the glitch on channel 2.

acquired. Because the TDS3000B oscilloscope can stop acquisition, sound a beep, make a hard copy or save the waveform when it detects an anomaly, you can run tests over long time periods – even unattended – to find those challenging, very infrequent failures.


# Digital Phosphor Oscilloscopes TDS3000B Series



Look for unintentional circuit noise with the TDS3000B Series' FFT capability.

# Simple, Speedy Documentation and Analysis

OpenChoice® solutions deliver simple, seamless integration between the oscilloscope and the PC. Using a standard built-in Ethernet port, e\*Scope web-based remote control allows you to control your TDS3000B oscilloscope from anywhere, using the Internet and your PC. With the TDS3GV optional communication module, floppy disk, TDSPCS1 OpenChoice software and integration with third-party software, the TDS3000B Series provides you with multiple choices to easily capture, transfer, document and analyze your measurement results. This seamless integration extends the power and value of these brilliantly engineered, affordable oscilloscopes.



TDS3AAM Advanced Analysis Module delivers advanced waveform math.


#### Flexible Features for Every Application

Optional application modules enable you to transform your oscilloscope into a specialized tool for limit testing, telecommunications mask testing, and video troubleshooting.

And, with its lightweight, compact size and battery pack, the TDS3000B Series oscilloscope can go wherever it is needed. It weighs only 4.5 kg (9.8 lbs.), with battery installed. Use the optional plug-in thermal printer to instantly document your work, even in the field.

#### **TDS3AAM** Advanced Analysis

**Module –** Adds extended math capability, arbitrary math expressions, measurement statistics and additional automated measurements.



The TDS3000B DPO with the TDS3LIM limit testing module is ideal for manufacturing test applications where fast Go/No-Go decisions are required.

**TDS3LIM Limit Testing Module** – Offers fast, accurate Go/No-Go verification that tested circuits are operating within intended parameters.

TDS3TMT Telecommunications Mask Testing Module – Pass/Fail compliance of ITU-T G.703 and ANSI T1.102 standards, custom mask testing and more. TDS3VID Extended Video Editing Module – Adds Video QuickMenu, autoset, holdoff, line count trigger, video picture mode, vectorscope mode,<sup>\*2</sup> HDTV format triggering graticules and more. TDS3SDI 601 Serial/Digital Video Module – Identify and analyze ITU-R BT.601 video signals, video picture mode with bright line select, vectorscope mode,<sup>\*2</sup> HDTV format triggering and

\*2 Vectorscope does not support composite video.

more.


TDS3000B Series

### ► Characteristics

#### TDS3000B Series Electrical Characteristics

	TDS3012B	TDS3014B	TDS3024B	TDS3032B	TDS3034B	TDS3044B	TDS3052B	TDS3054B
Bandwidth	100 MHz	100 MHz	200 MHz	300 MHz	300 MHz	400 MHz	500 MHz	500 MHz
Channels	2	4	4	2	4	4	2	4
Sample rate on Each Channel	1.25 GS/s	1.25 GS/s	2.5 GS/s	2.5 GS/s	2.5 GS/s	5 GS/s	5 GS/s	5 GS/s
Maximum Record Length	10 K points on all models							
Vertical Resolution		9-Bits on all models						
Vertical Sensitivity (/div)	1 mV to 10 V on all models							
Vertical Accuracy	±2% on all models							
Max Input Voltage (1 MΩ)	150 $V_{\text{RMS}}$ CAT I on all models (300 V CAT II with standard 10X probe)							
Position Range	± 5 div on all models							
BW Limit	20 MHz	20 MHz	20, 150 MHz	20, 150 MHz	20, 150 MHz	20, 150 MHz	20, 150 MHz	20, 150 MHz
Input Coupling	AC, DC, GND on all models							
Input Impedance Selections	1 $M\Omega$ in parallel with 13 pF or 50 $\Omega$ on all models							
Time Base Range	4 ns to 10 s/div	4 ns to 10 s/div	2 ns to 10 s/div	2 ns to 10 s/div	2 ns to 10 s/div	1 ns to 10 s/div	1 ns to 10 s/div	1 ns to 10 s/div
Time Base Accuracy	20 ppm on all models							
Display (VGA)		Color active matrix LCD on all models						

#### **Digital Phosphor Oscilloscopes** TDS3000B Series



TDS3000B DPO provides breakthrough test speeds for telecommunications line card testing. The telecom QUICKMENU puts all the commonly used telecom testing functions on a single menu.

#### Acquisition Modes

**DPO** – Captures and displays complex waveforms. random events and subtle patterns in actual signal behavior. DPOs are able to provide 3 dimensions of signal information in real time: Amplitude, time and the distribution of amplitude over time.


Peak Detect - High frequency and random glitch capture. Captures glitches as narrow as 1 ns. WaveAlert® - Monitors the incoming signals on all channels and alerts the user to any waveform that deviates from the normal waveform being acquired.

Sample - Sample data only.

Envelope - Max/Min values acquired over one or more acquisitions.

Average - Waveform data from 2 to 512 (selectable) acquisitions is averaged.

Single Sequence – Use the Single Sequence button to capture a single triggered acquisition sequence at a time.



Custom video trigger allows the TDS3000B to trigger on standards such as RS343 (26.2 kHz scan rate).

Main Trigger Modes - Auto (supports Roll Mode

Trigger After Time Range - 13.2 ns to 50 s.

**External Trigger Input** – >1 M $\Omega$  in parallel with

Edge - Conventional level-driven trigger. Positive or

negative slope on any channel. Coupling selections:

Video - Trigger on all lines, odd, even or all fields.

lines and on analog HDTV formats (1080i, 1080p,

PATTERN: Specifies AND, OR, NAND, NOR when true

STATE: Any logic state. Triggerable on rising or falling

edge of a clock. Logic triggers can be used on

With TDS3VID or TDS3SDI, trigger on individual

**Trigger System** 

for 40 ms/div and slower), Normal.

Trigger After Events Range -

1 to 9,999,999 events.

**Trigger Types** 

or false for a specific time.

combinations of 2 inputs (not 4).

720p, 480p).

Logic -

B Trigger - Trigger after time or events.

17 pF; Max input voltage is 150  $V_{\text{RMS}}.$ 

DC. noise reject. HF reject. LF reject.



Trace and identify ITU-R BT.601 video signals with the TDS3SDI 601 Serial Digital Video Module.

#### Pulse -

WIDTH (or GLITCH): Trigger on pulse width less than, greater than, equal to or not equal to a selectable time limit ranging from 39.6 ns to 50 s. RUNT: Trigger on a pulse that crosses one threshold

but fails to cross a second threshold before crossing the first again.

SLEW RATE: Trigger on pulse edge rates that are either faster or slower than a set rate. Edges can be rising, falling or either.

Comm (requires TDS3TMT) - Provides isolated pulse triggering required to perform DS1/DS3 telecommunications mask testing per ANSI T1.102 standard.

Alternate - Sequentially uses each active channel as a trigger source.

#### **Measurement System** Automatic Waveform Measurements -

Period, Frequency, +Width, -Width, Rise Time, Fall Time, +Duty Cycle, -Duty Cycle, +Overshoot, -Overshoot, High, Low, Max, Min, Peak-to-Peak, Amplitude, Mean, Cycle Mean, RMS, Cycle RMS, Burst Width, Delay, Phase, Area,\*3 Cycle Area,\*3 Display any four measurements from any combination of waveforms. Or display all measurements with measurement snapshot feature. Measurement statistics.\*3

Thresholds - Settable in percentage or voltage. Gating - Measurements can be gated using the screen or vertical cursors.

\*3 Requires TDS3AAM module.

### **Digital Phosphor Oscilloscopes**

TDS3000B Series

#### **Waveform Processing**

**Deskew** – Channel-to-channel deskew  $\pm 10$  ns may be manually entered for better timing measurements and more accurate math waveforms. **Arithmetic Operators** – Add, subtract, multiply, divide, arbitrary math expressions.<sup>3</sup> **Autoset** – Single-button, automatic setup on selected input signal for vertical, horizontal and trigger systems.

#### Display Characteristics Waveform Style –

Dots, vectors and variable persistence. **Graticules –** Full, grid, cross-hair and frame. NTSC, PAL, SECAM and vectorscope (100% and 75% color bars) with optional TDS3VID and TDS3SDI video application modules. **Format –** YT, XY and Gated XYZ (XY with Z-axis

blanking available on TDS30X4B only).

#### I/O Interface

Hard Copy Port (Standard) – Centronics-type parallel. Ethernet Port (Standard) – 10Base-T LAN, RJ-45 female.

TDS3GV Communications Module – GPIB (IEEE 488.2) programmability: Full talk/listen modes; control of all modes, settings and measurements. VGA: Monitor output for direct display on large VGA-equipped monitors. DB-15 female connector, 31.6 kHz sync rate, EIA RS-343A compliant. RS-232-C interface programmability: Full talk/listen modes; control of all modes, settings and measurements. Baud Rate up to 38,400. DB-9 male connector. Programmer manual: 071-0381-02.

\*3 Requires TDS3AAM module.

#### Hard Copy Capability

Graphics File Formats – Interleaf (.img), TIF, PCX (PC Paintbrush), BMP (Microsoft Windows) and Encapsulated Postscript (EPS). Printer Formats – Bubblejet, DPU-3445, Thinkjet, Deskiet, Laserjet, Epson (9- and 24-Pin).

#### **Environmental and Safety**

 $\label{eq:constant} \begin{array}{l} \mbox{Temperature} - +5 \ ^{o}\mbox{C} \ to +50 \ ^{o}\mbox{C} \ (operating), \\ -20 \ ^{o}\mbox{C} \ to +60 \ ^{o}\mbox{C} \ (nonoperating). \\ \mbox{Humidity} - 20\% \ to \ 80\% \ RH \ below \ 32 \ ^{o}\mbox{C}, \ derate \ to \end{array}$ 

30% RH at 45 °C (operating), 5% to 90% RH below 41 °C, derate to 30% RH at 60 °C (nonoperating). Altitude –

To 3,000 m (operating), 15,000 m (nonoperating). **Electromagnetic Compatibility** – Meets or exceeds EN55011 Class A radiated and conducted emissions; EN50082-1; FCC 47 CFR, Part 15, Subpart B, Class A; Australian EMC framework; Russian GOST EMC regulations. **Safety** –

UL3111-1, CSA1010.1, EN61010-1, IEC61010-1.

#### Physical Characteristics Instrument

mouumont		
Dimensions	mm	in.
Width	375.0	14.8
Height	176.0	6.9
Depth	149.0	5.9
Weight	kg	lbs.
Instrument only	3.2	7.0
with battery installed	4.5	9.8
Instrument Shipping		
Package Dimensions	mm	in.
Width	502.0	19.8
Height	375.0	14.8
Depth	369.0	14.5
Rackmount		
Dimensions	mm	in.
Width	484.0	19.0
Height	178.0	7.0
Depth	152.0	6.0

### Ordering Information

#### TDS3012B, TDS3014B, TDS3024B, TDS3032B, TDS3034B, TDS3044B, TDS3052B, TDS3054B

TDS3000B Digital Phosphor Oscilloscopes.

#### **Standard Accessories**

Probes: 2 each P3010 10X passive probes (TDS3012B), 4 each P3010 10X passive probes (TDS3014B), 2 each P6139A 10X passive probes (TDS3032B and TDS3052B), 4 each P6139A 10X passive probes (TDS3024B, TDS3034B, TDS3044B and TDS3054B).

Documentation: User manual, quick reference manual and programmer's manual.

Power Cord

Accessory Tray.

Protective Front Cover: Has holder for user manual and/or 3.5 in. floppy disks.

NIST-Traceable Certificate of Calibration.

Please specify power plug and manual version when ordering.

#### **Recommended Accessories**

**TDS3TMT –** Telecom mask testing application module.

TDS3AAM - Advanced analysis module.

TDS3LIM - Limit test module.

TDS3VID - Extended video application module.

**TDS3SDI** – 601 serial digital video module. Requires a 4-channel TDS3000B Series oscilloscope.

**TDS3GV** – GPIB, VGA, RS-232 interfaces and TDSPCS1 OpenChoice® PC Communication Software.

TDSPCS1 OpenChoice PC Communication Software – A collection of programs that enable fast and easy transfer communication between MS Windows PCs and Tektronix oscilloscopes. Available in single-license packages and included in TDS3GV communication module. Minimum system requirements: MS Windows 98 SE/XP Professional/ME/ 2000. MS Office 2000 or XP (for TDS toolbars only) – Excel 2000 or 2002; Word 2000 or 2002.

# Digital Phosphor Oscilloscopes TDS3000B Series



TDS3BATB – Lithium Ion battery pack delivers up to 3 hours continuous operation without line power.\*1

#### WaveStar<sup>™</sup> Software for Oscilloscopes -

Microsoft Windows 98/ME/2000/NT 4.0 Application.

**TDS3BATB** – Lithium Ion battery pack for up to 3 hours continuous operation without line power.\*1

**TDS3CHG** – Fast charger for battery pack.

TDS3PRT – Plug-in printer adds easy, portable documentation capability to your TDS3000B oscilloscope.

**016-1907-00** – 5-roll pack of paper for TDS3PRT plug-in thermal printer.

AC3000 - Soft case for carrying instrument.

HCTEK4321 – Hard plastic case for carrying instrument (requires AC3000).

RM3000 - Rackmount kit.

Service Manual (TDS3000B Series) – English only (071-0972-00).

**TNGTDS01** – Self-paced self-study operator training kit.

For customer training on this product outside the U.S. call 1-503-627-7510, inside the U.S. call 1-800-833-9200 ext. 77510.

#### **Recommended Probes**

**ADA400A** – 100X, 10X, 1X, 0.1X high gain differential amplifier.

P6243 – 1 GHz, ≤1 pF input C 10X active probe.

\*1 Temporarily not available.



TDS3PRT – Plug-in printer provides instant, portable documentation of your work.

**P5205 –** 1.3 kV, 100 MHz high voltage differential probe.

**P5210 –** 5.6 kV, 50 MHz high voltage differential probe.

P5100 – 2.5 kV, 100X high-voltage passive probe.

TCP202 – 50 MHz, 15 A AC/DC current probe.

TCP303<sup>\*4</sup> – 15 MHz, 150 A current probe.

TCP305<sup>\*4</sup> – 50 MHz, 50 A current probe.

TCP312<sup>\*4</sup> – 100 MHz, 30 A current probe.

TCPA300 – 100 MHz probe amplifier.

TCP404XL\*5 – 2 MHz, 500 A current probe.

TCPA400 – 50 MHz probe amplifier.

#### **International Power Plugs**

- Opt. A0 North America power.
- Opt. A1 Universal EURO power.
- Opt. A2 United Kingdom power.
- Opt. A3 Australia power.
- Opt. A5 Switzerland power.
- Opt. A6 Japan power.
- Opt. A10 China power.
- Opt. A99 No power cord.
- \*4 Requires TCPA300 probe amplifier.

\*5 Requires TCPA400 probe amplifier.



Tektronix probes are expressly designed for your oscilloscope, with identical quality standards and built-in compatibility for optimum performance.

#### Language Options

(Includes front panel overlay.)

- Opt. LO English.
- Opt. L1 French.
- Opt. L2 Italian.
- Opt. L3 German.
- Opt. L4 Spanish.
- Opt. L5 Japanese.
- Opt. L6 Portuguese.
- **Opt. L7 –** Simplified Chinese.
- Opt. L8 Traditional Chinese.
- Opt. L9 Korean.
- Opt. LR Russian.
- Opt. L99 No manual.

#### Service

Opt. C3 - Calibration Service 3 years.

- Opt. C5 Calibration Service 5 years.
- **Opt. D1 –** Calibration Data Report.
- **Opt. D3** Calibration Data Report 3 years (with Opt. C3).

**Opt. D5** – Calibration Data Report 5 years (with Opt. C5).

Opt. R5 - Repair Service 5 years.

#### Warranty

Three year warranty covering all labor and parts, excluding probes.

### **Digital Phosphor Oscilloscopes**

TDS3000B Series

#### **Contact Tektronix:**

ASEAN / Australasia (65) 6356 3900 Austria +41 52 675 3777 Balkan, Israel, South Africa and other ISE Countries +41 52 675 3777 Belaium 07 81 60166 Brazil & South America (11) 40669400 Canada 1 (800) 661-5625 Central East Europe, Ukraine and the Baltics +41 52 675 3777 Central Europe & Greece +41 52 675 3777 Denmark +45 80 88 1401 Finland +41 52 675 3777 France +33 (0) 1 69 86 81 81 Germany +49 (221) 94 77 400 Hong Kong (852) 2585-6688 India (91) 80-22275577 Italy +39 (02) 25086 1 Japan 81 (3) 6714-3010 Luxembourg +44 (0) 1344 392400 Mexico, Central America & Caribbean 52 (55) 5424700 Middle East, Asia and North Africa +41 52 675 3777 The Netherlands 090 02 021797 Norway 800 16098 People's Republic of China 86 (10) 6235 1230 Poland +41 52 675 3777 Portugal 80 08 12370 Republic of Korea 82 (2) 6917-5000 Russia & CIS +7 (495) 7484900 South Africa +27 11 206 8360 Spain (+34) 901 988 054 Sweden 020 08 80371 Switzerland +41 52 675 3777 Taiwan 886 (2) 2722-9622 United Kingdom & Eire +44 (0) 1344 392400 USA 1 (800) 426-2200

> For other areas contact Tektronix, Inc. at: 1 (503) 627-7111 Updated 01 June 2007

Our most up-to-date product information is available at: www.tektronix.com

Product(s) are manufactured in ISO registered facilities




41W-12482-16

Copyright © 2007, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix. Inc. All other trade names referenced are the service marks. trademarks or registered trademarks of their respective companies

CE

DV/WOW



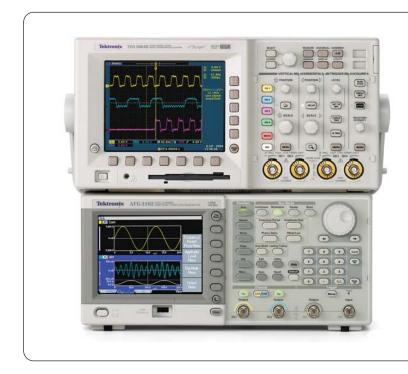

- ► A Critical Component of the Complete Measurement Solution. The AFG3000 Series arbitrary function generator pairs with the TDS3000B. TPS2000. TDS2000 and TDS1000 Series digital oscilloscopes to deliver the two elements of a complete measurement solution - stimulus and acquisition. When combined with the TDS3000B Series oscilloscopes, it provides you with a common look and feel between both instruments to increase your productivity; high performance in a small footprint; and stackability, saving valuable workbench space - all at a price you can afford.
- Tektronix Support Completes the Solution. We know you depend on Tektronix instrument solutions when you make and meet critical commitments. So we make and meet a support commitment you can depend on. Anytime you need support, anywhere in the world,

Tektronix Support gives you the lowest possible exposure to inconvenience, delay or disruption of operations.

- Unsurpassed technical expertise and experience with 24-hour response to technical questions
- Interactive, online support to request assistance, check service status or arrange for training
- Industry-leading service turn-around time
- Credible, reliable support with demon-► strated on-time delivery
- ► 90-day unconditional service warranty
- No fine print, no exclusions, no surprises
- Global support in more than 50 countries

Depend on Tektronix. Visit www.tektronix.com/support